
12in Rivington 1 Sconce Manual

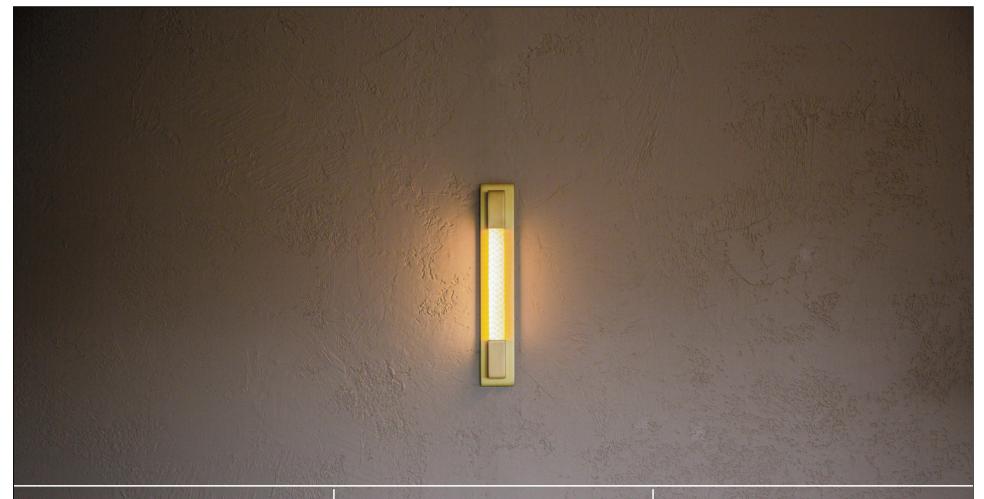

POWER REQUIREMENTS

3W @ 24VDC
One Class 2 LED driver required.
DO NOT CONNECT DIRECTLY TO LINE VOLTAGE!


MOUNTING

Fixture can be mounted directly to any type of hollow wall. Toggle bolts are included for mounting to drywall. For installations requiring a junction box, consider Rivington 2. Fixture weighs less than 2 pounds.

TECHNICAL SUPPORT

Scan the QR code to view the fixture in 3D! Call us at the number below if you need help.



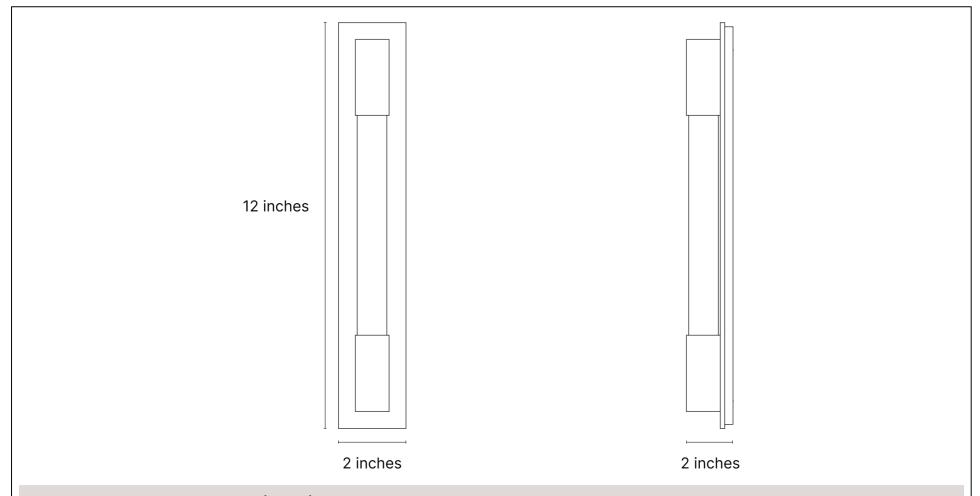



THIS IS A LOW VOLTAGE (24VDC) FIXTURE.


Do not wire this fixture directly to line voltage! This fixture requires a 24VDC Class 2 Transformer (LED Driver). The 24VDC driver must be mounted per the included manufacturer's instructions. Also, please ensure that the wiring system complies with NEC requirements.




PLEASE HANDLE WITH CARE.

Keep all protective sleeves in place until fixture installation is complete. Protect the rope from nearby paint and construction dust. Keep the entire fixture covered until all nearby work is completed. Failure to handle components with care may result in permanent damage.




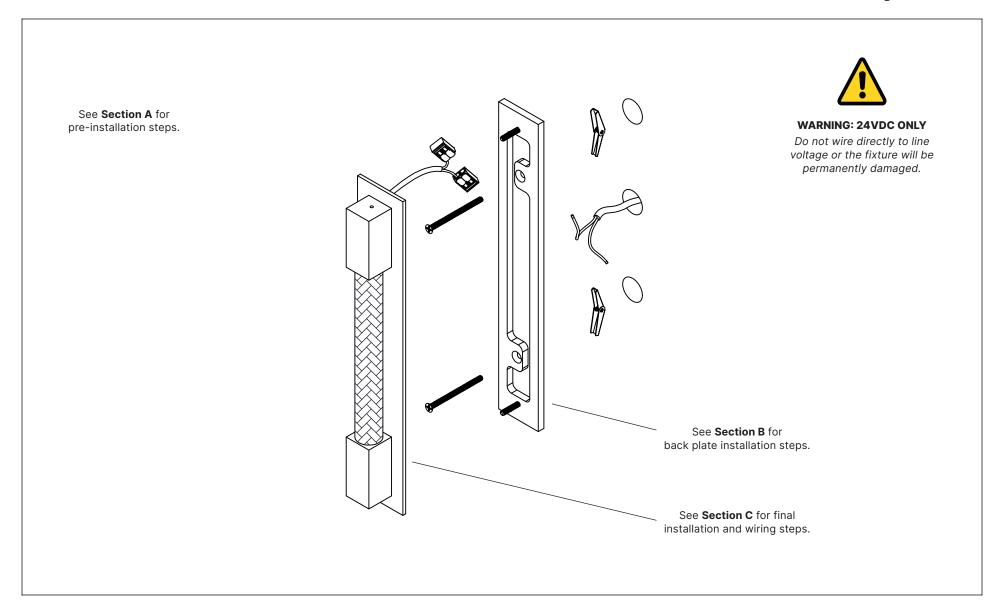

Section A: Pre-Installation

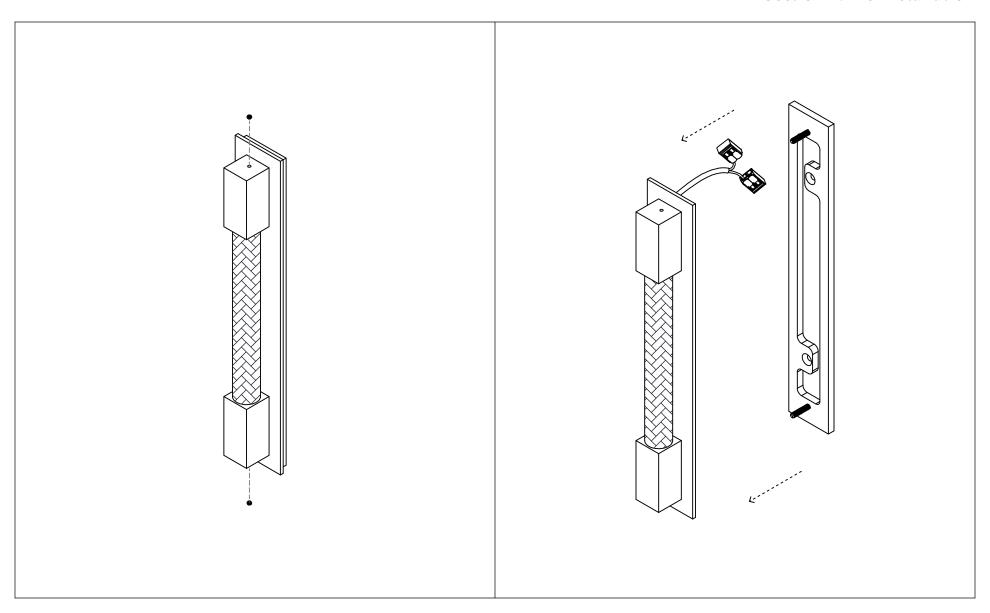

Section B: Back Plate Installation

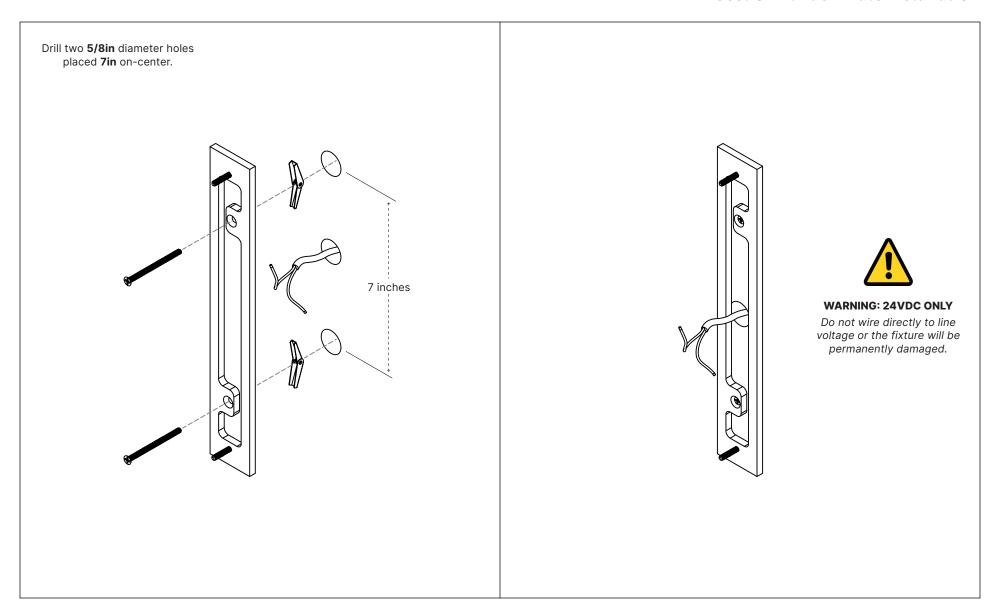

Section C: Final Installation

