


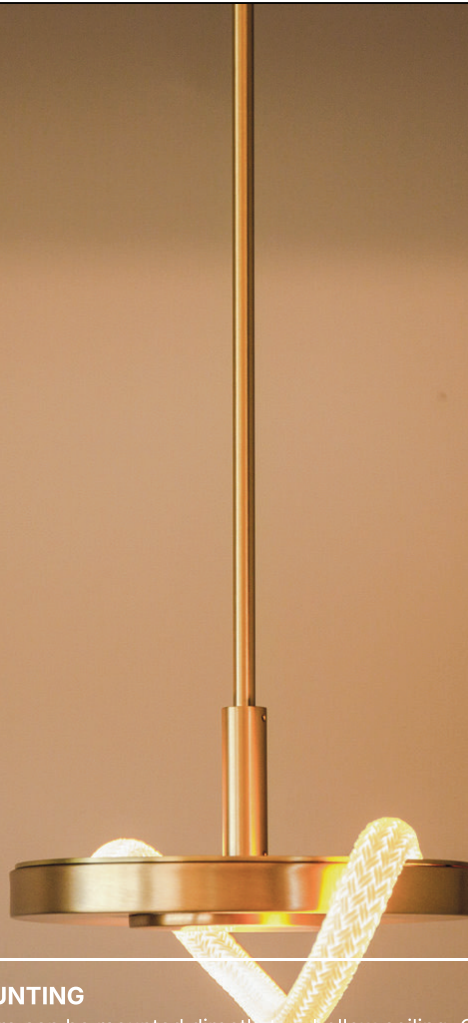

POWER REQUIREMENTS

10W @ 24VDC
One Class 2 LED driver required.
DO NOT CONNECT DIRECTLY TO LINE VOLTAGE!

MOUNTING

Fixture can be mounted directly to a hollow ceiling. Can be installed on ceilings with up to 30° of slope. For junction box installation, use our Essex Pendant (Left) (5in Canopy). Fixture weighs less than 6 pounds.


TECHNICAL SUPPORT

Scan the QR code to view the fixture in 3D!
Call us at the number below if you need help.




Vertical
Rod Height

3 inches

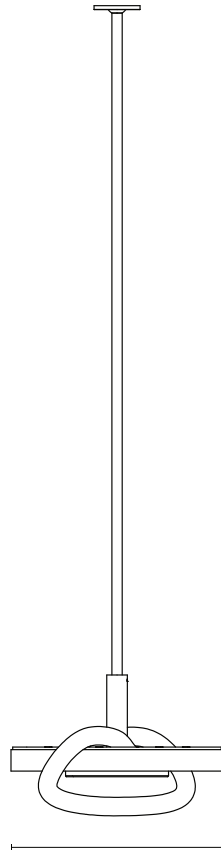

10 inches

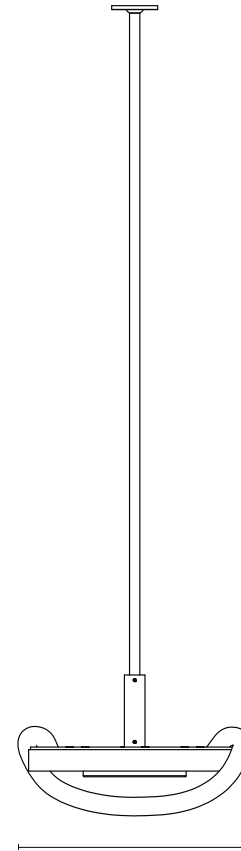

12 inches



THIS IS A LOW VOLTAGE (24VDC) FIXTURE.

Do not wire this fixture directly to line voltage! This fixture requires a 24VDC Class 2 Transformer (LED Driver). The 24VDC driver must be mounted per the included manufacturer's instructions. Also, please ensure that the wiring system complies with NEC requirements.




PLEASE HANDLE WITH CARE.




Keep all protective sleeves in place until fixture installation is complete. Protect the rope from nearby paint and construction dust. Keep the entire fixture covered until all nearby work is completed. Failure to handle components with care may result in permanent damage.


CONTACT US WITH ANY QUESTIONS!

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024
WWW.LUKELAMPCO.COM
INFO@LUKELAMPCO.COM

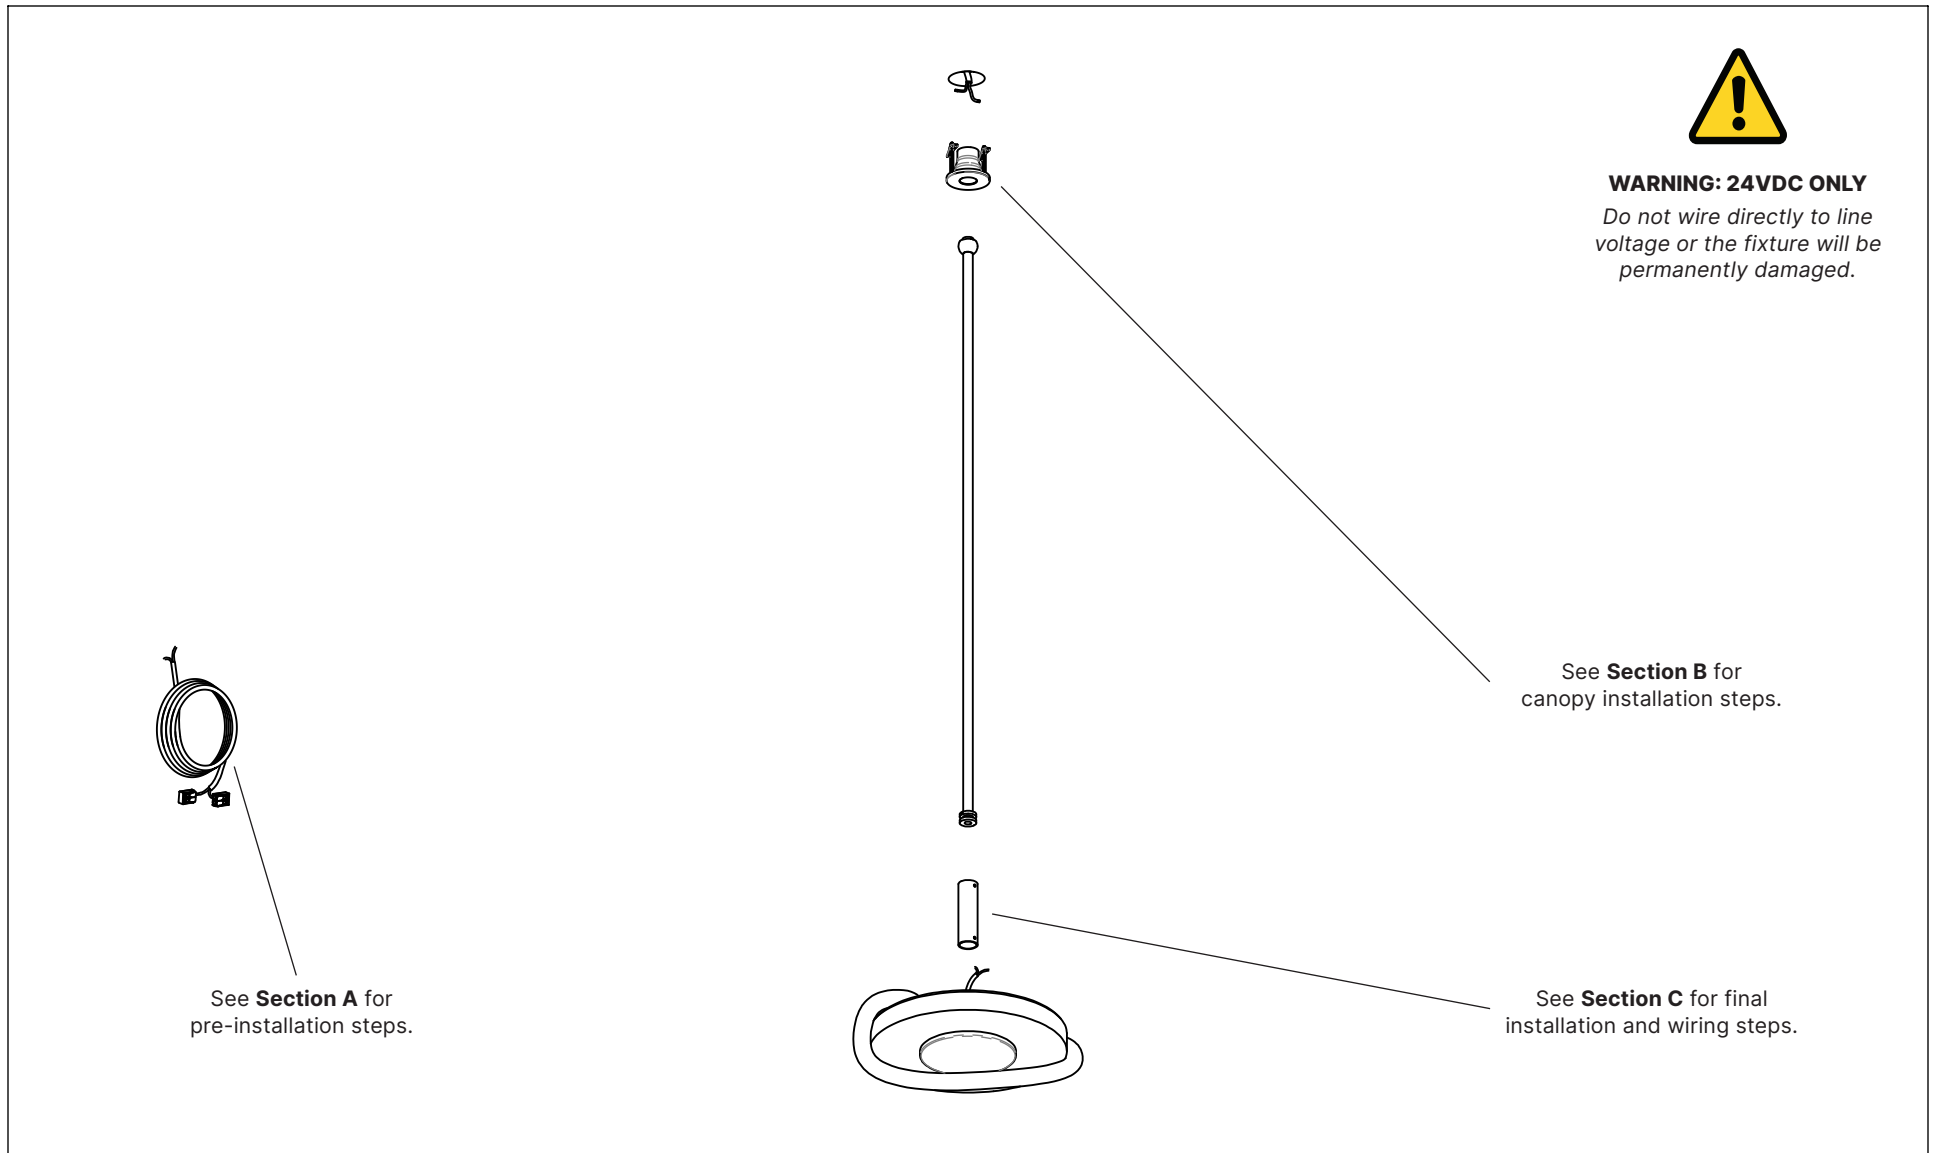


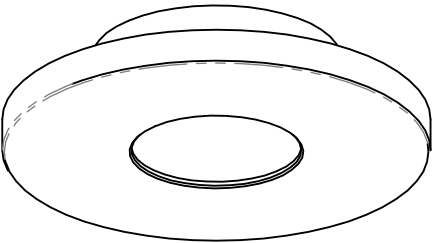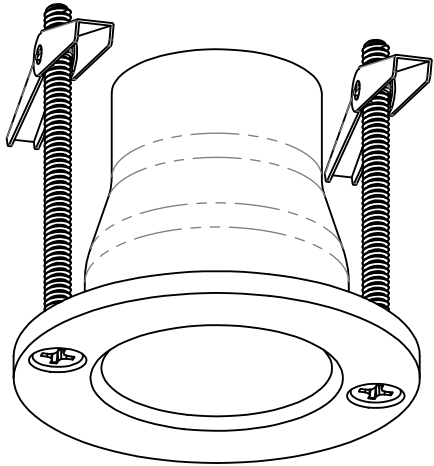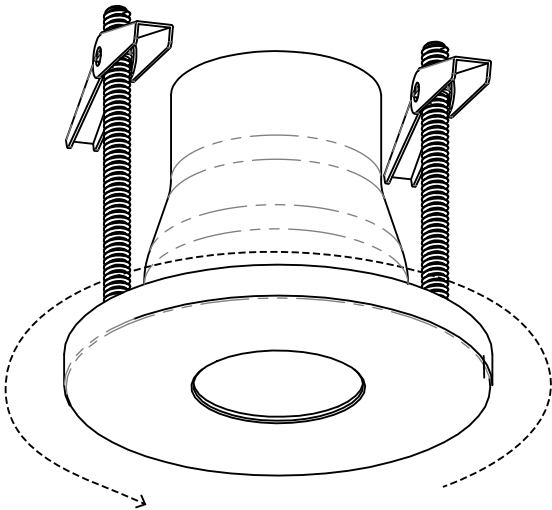

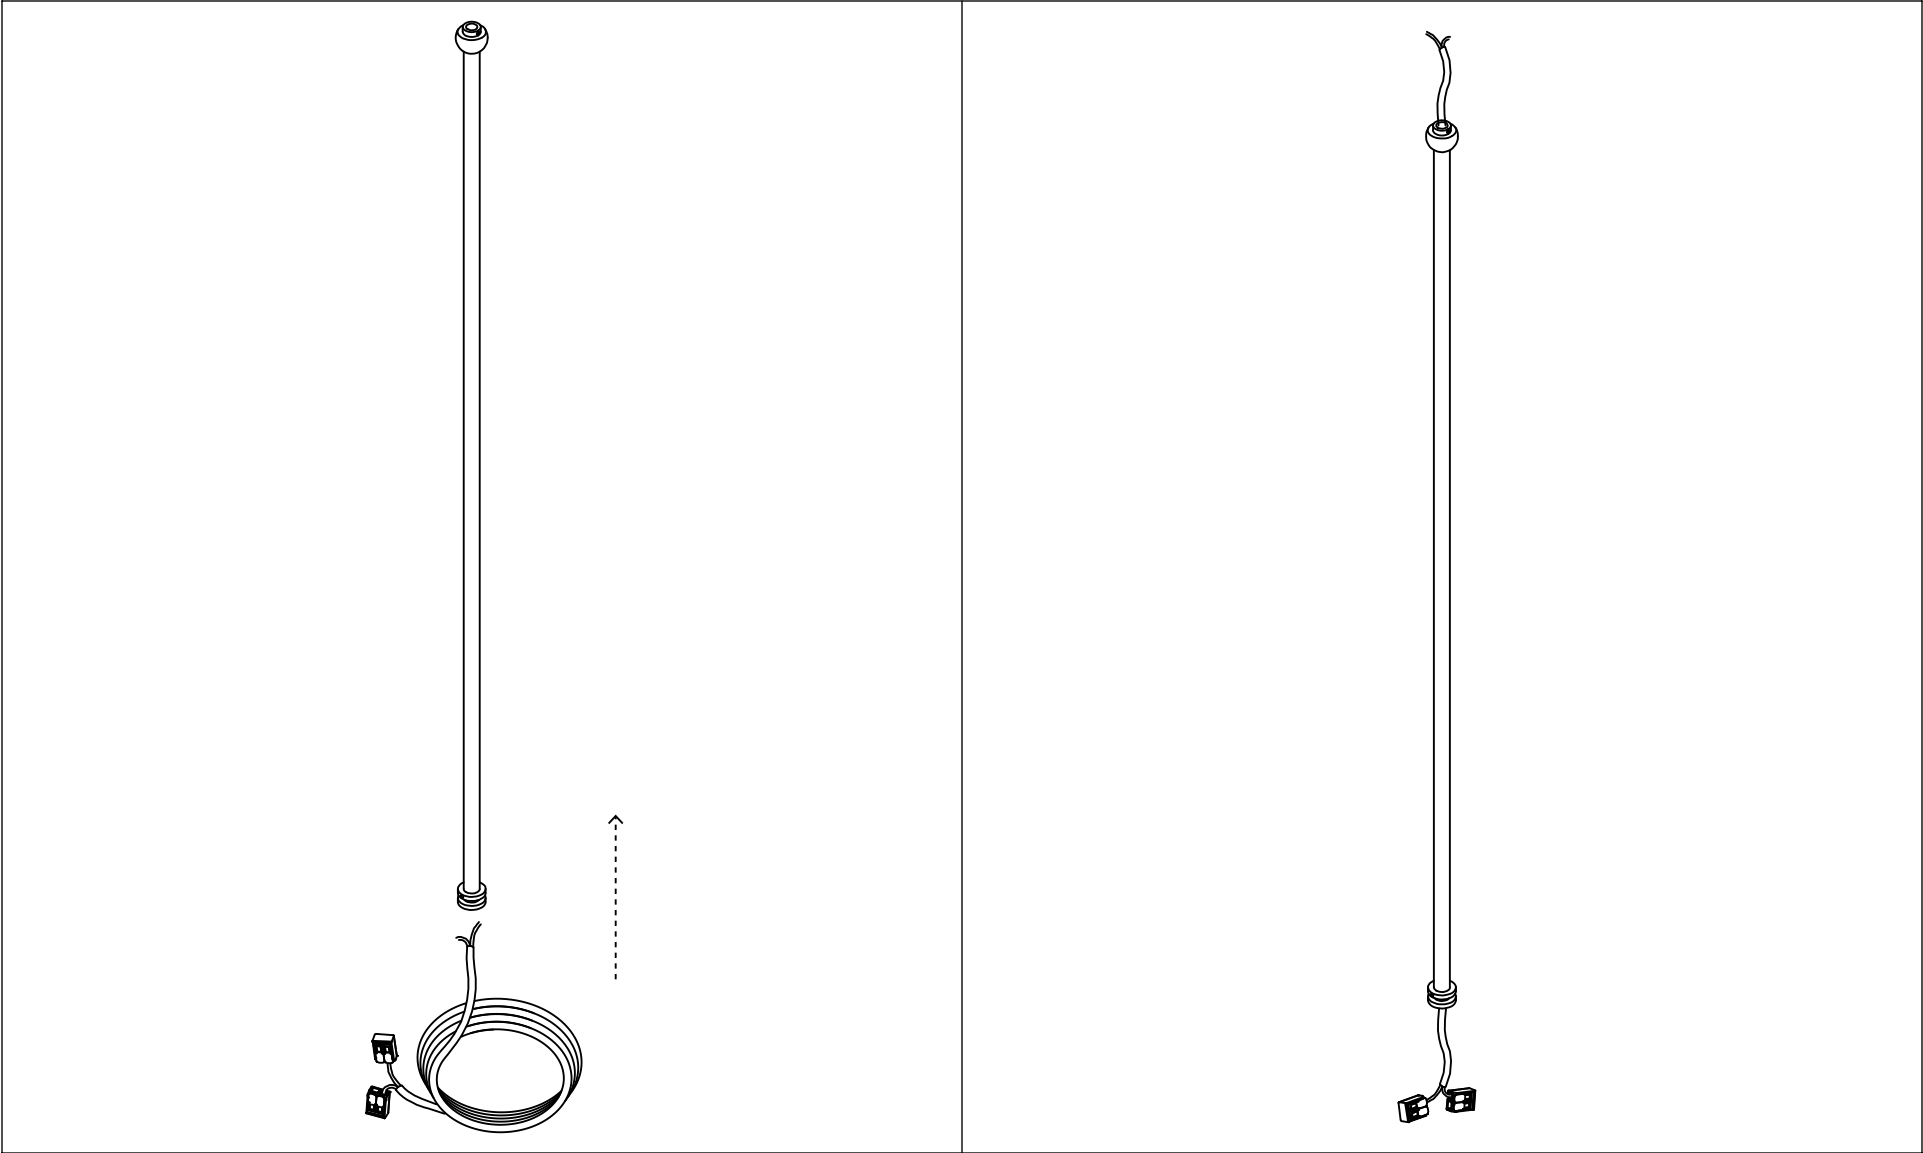



CONTACT US WITH ANY QUESTIONS!
Technical Support: (914) 294-2024 ext. 2

(914) 294-2024
WWW.LUKELAMPCO.COM
INFO@LUKELAMPCO.COM

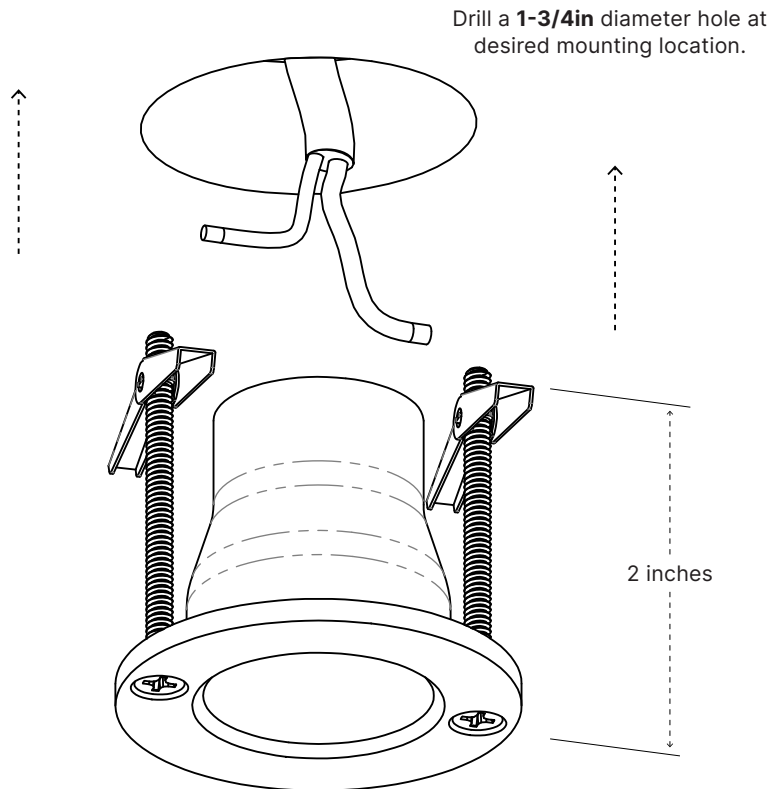


WARNING: 24VDC ONLY

Do not wire directly to line voltage or the fixture will be permanently damaged.

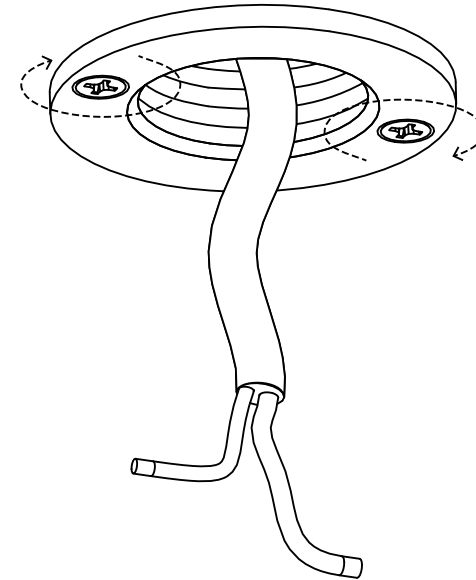

Before Tightening

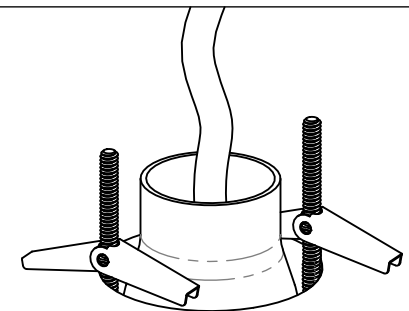



After Tightening

CONTACT US WITH ANY QUESTIONS!

Technical Support: (914) 294-2024 ext. 2


(914) 294-2024
WWW.LUKELAMPCO.COM
INFO@LUKELAMPCO.COM

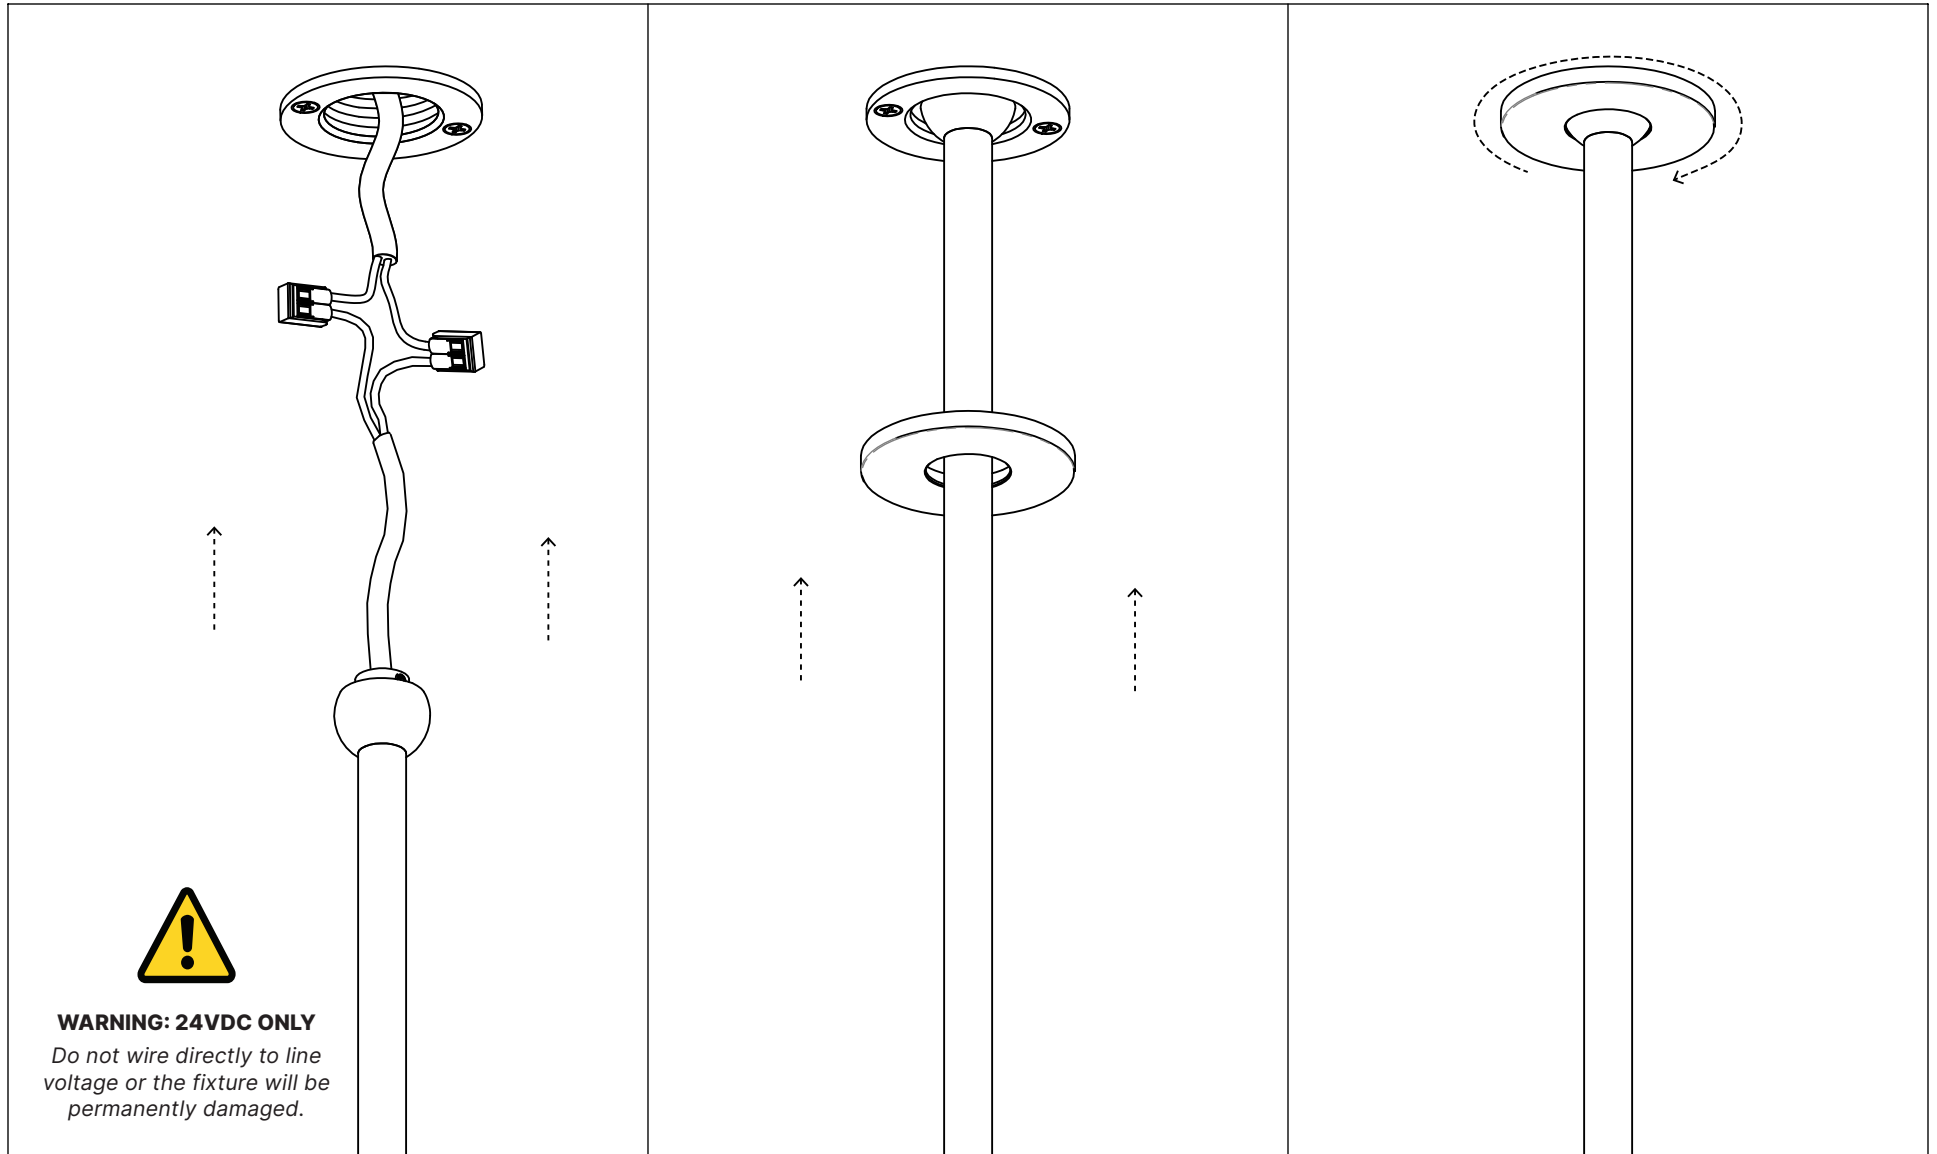

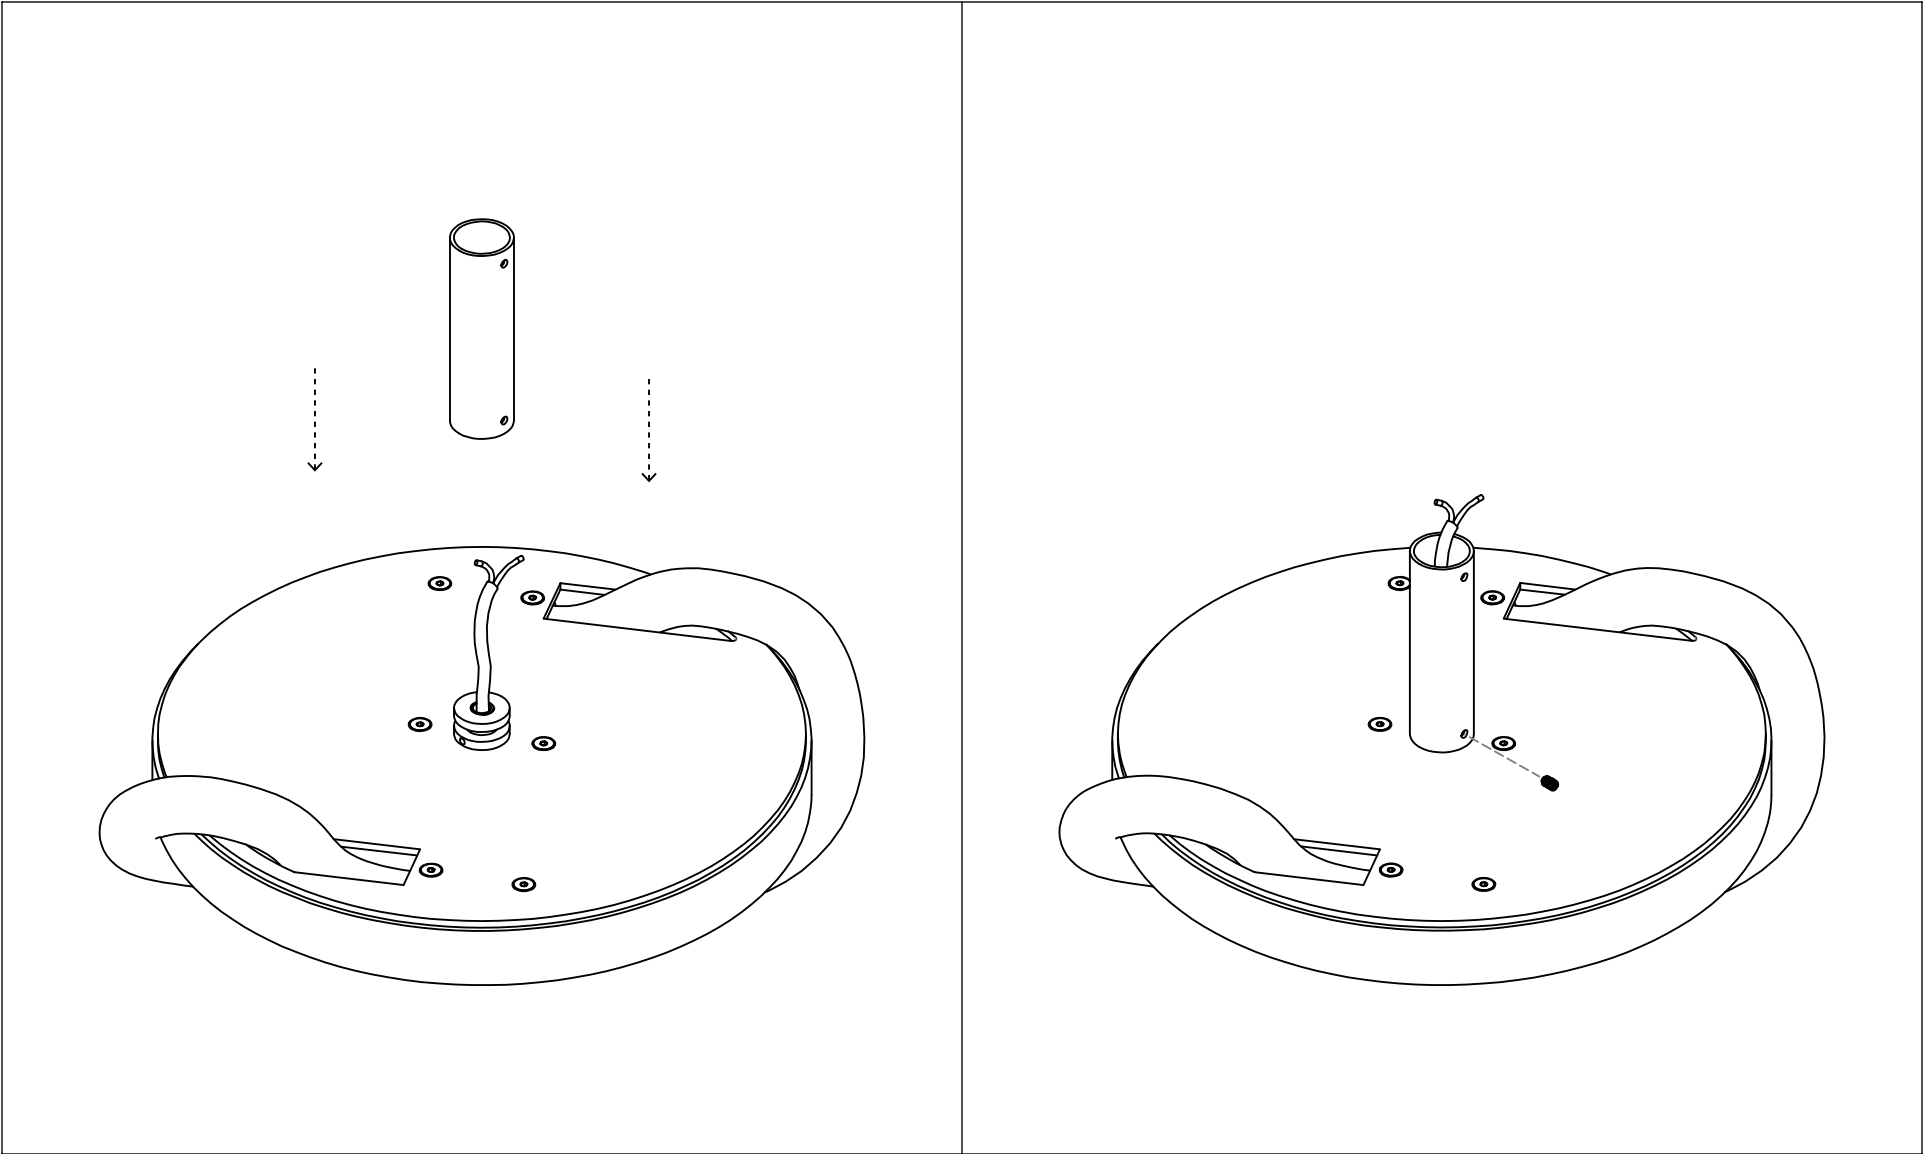

CONTACT US WITH ANY QUESTIONS!
Technical Support: (914) 294-2024 ext. 2

(914) 294-2024
WWW.LUKELAMPCO.COM
INFO@LUKELAMPCO.COM

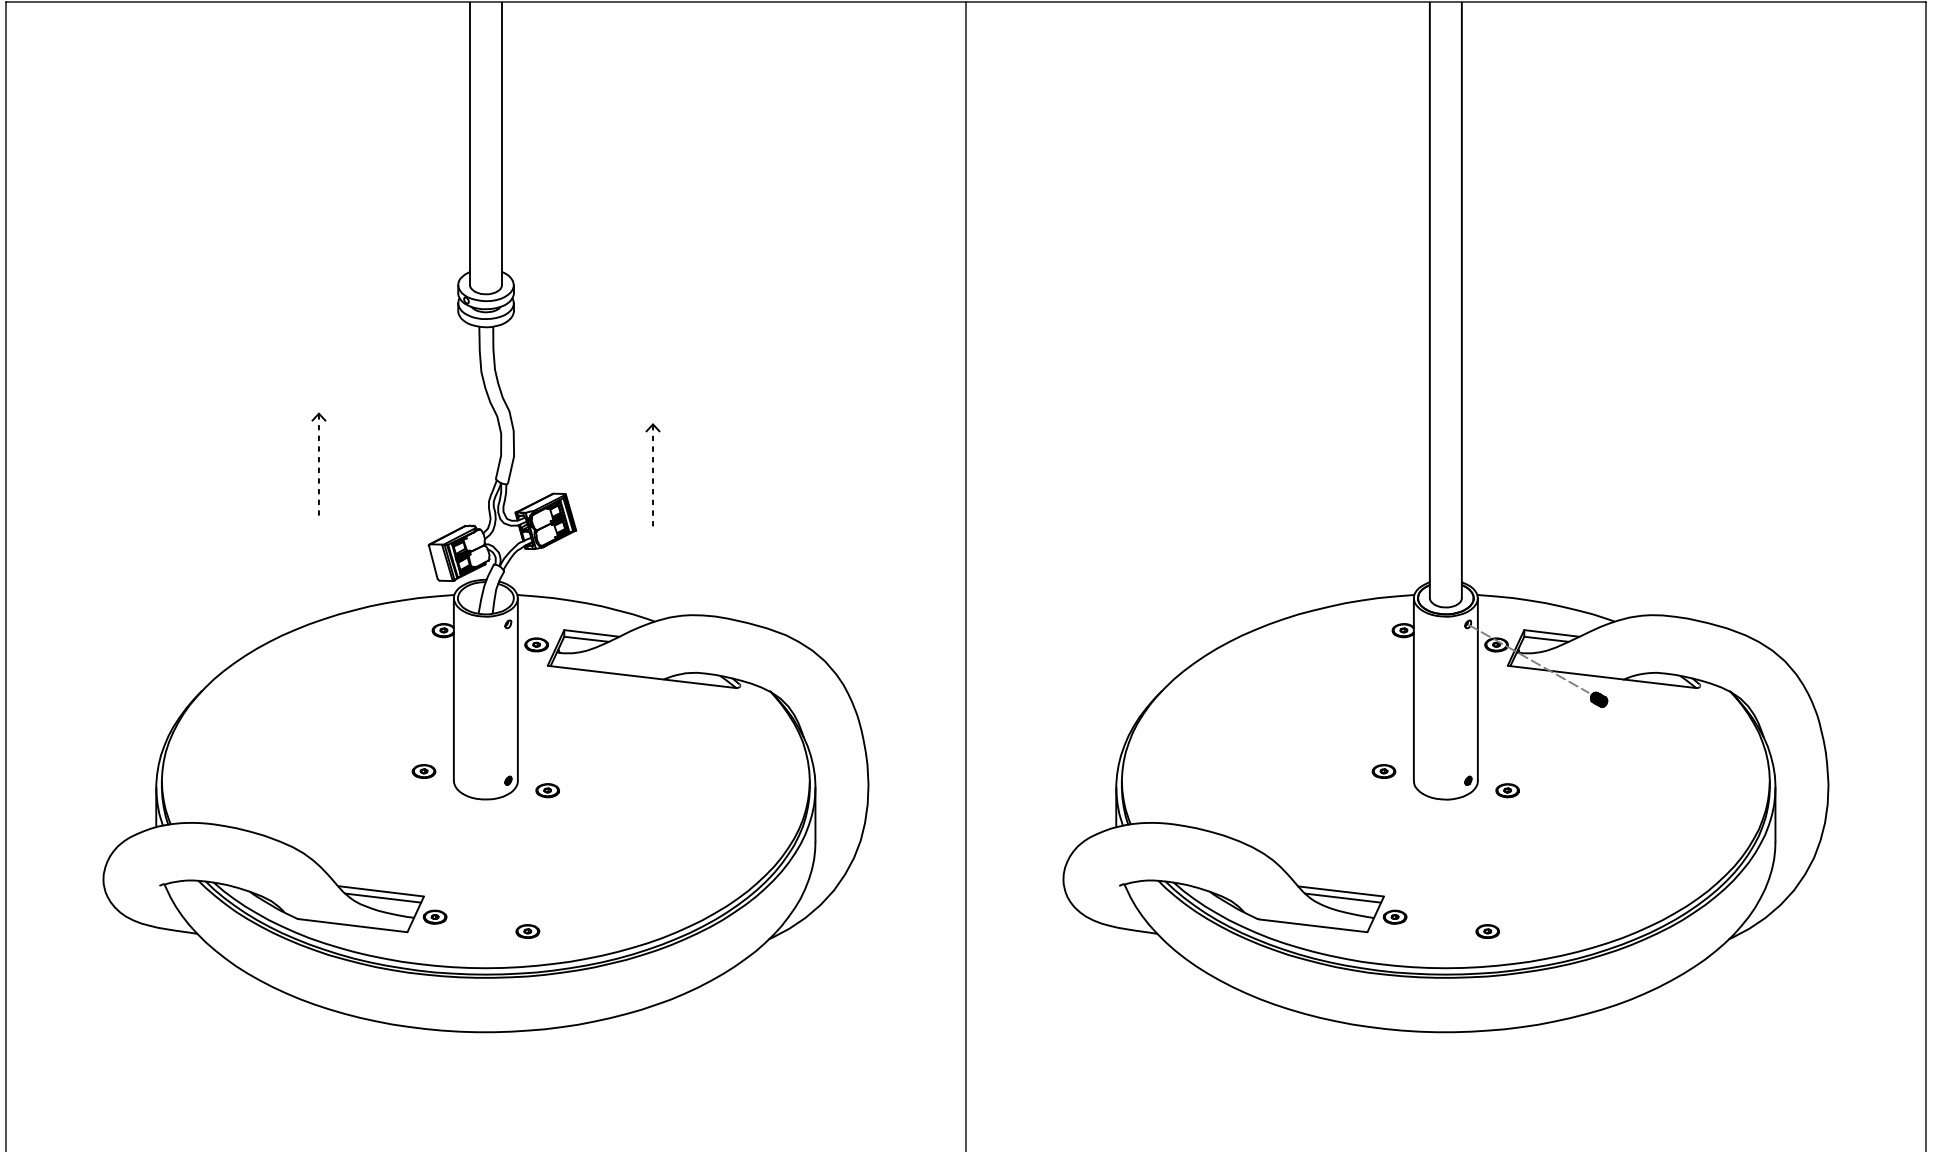

CONTACT US WITH ANY QUESTIONS!

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024
WWW.LUKELAMPCO.COM
INFO@LUKELAMPCO.COM

Cut rod sleeve to desired length.	First, cut the rod sleeve to the desired length. Take care to avoid damaging the finish. Cuts must be square and free of burrs. For more information, visit: lukelampco.com/videoresources
Cut threaded rod 1-1/4 inches longer than rod sleeve.	Next, cut the threaded rod 1-1/4 inches longer than the rod sleeve.
Fixture End 1/4 inch Canopy End 1 inch Insert threaded rod into rod sleeve.	Finally, insert the threaded rod into the rod sleeve. The threaded rod should protrude 1/4 inch on the fixture end and 1 inch on the canopy end. Install the threaded ball on the canopy end, and the vertical mount insert on the fixture end.