
LUKE LAMP

## 4.5ft Trellis Pendant 1.1C Manual

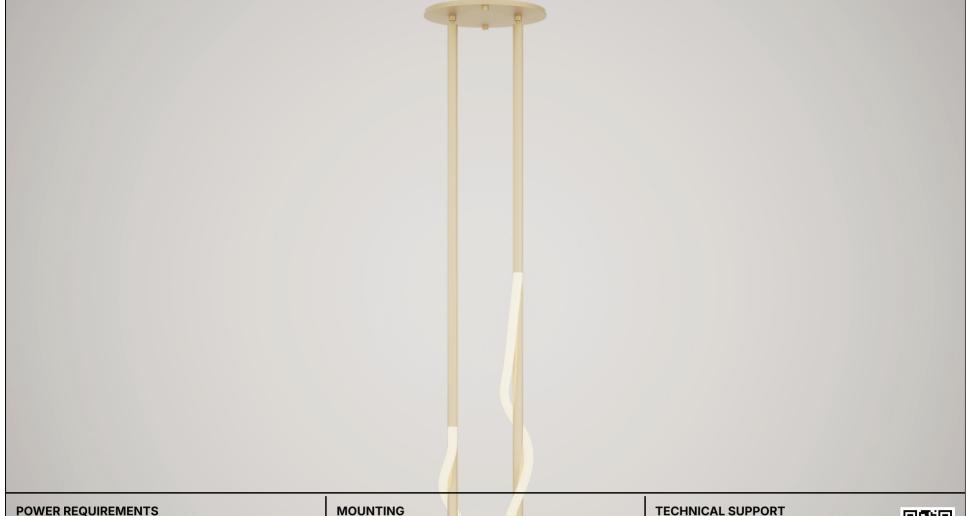


13W @ 24VDC One Class 2 LED driver required. DO NOT CONNECT DIRECTLY TO LINE VOLTAGE!

Fixture can be mounted directly to any type of hollow ceiling. Toggle bolts are included for mounting to drywall. Junction box optional. Fixture weighs less than 12 pounds.

## **TECHNICAL SUPPORT**

Need help styling the rope? Scan the QR code to view the fixture in 3D! Call us at the number below if you need help.



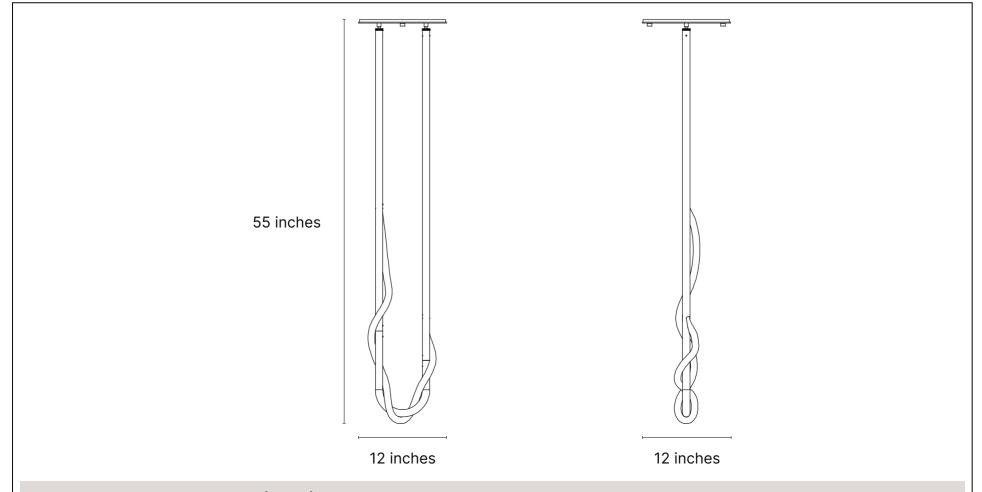



## THIS IS A LOW VOLTAGE (24VDC) FIXTURE.


Do not wire this fixture directly to line voltage! This fixture requires a 24VDC Class 2 Transformer (LED Driver). The 24VDC driver must be mounted per the included manufacturer's instructions. Also, please ensure that the wiring system complies with NEC requirements.




### PLEASE HANDLE WITH CARE.

Keep all protective sleeves in place until fixture installation is complete. Protect the rope from nearby paint and construction dust. Keep the entire fixture covered until all nearby work is completed. Failure to handle components with care may result in permanent damage.


## Exploded View

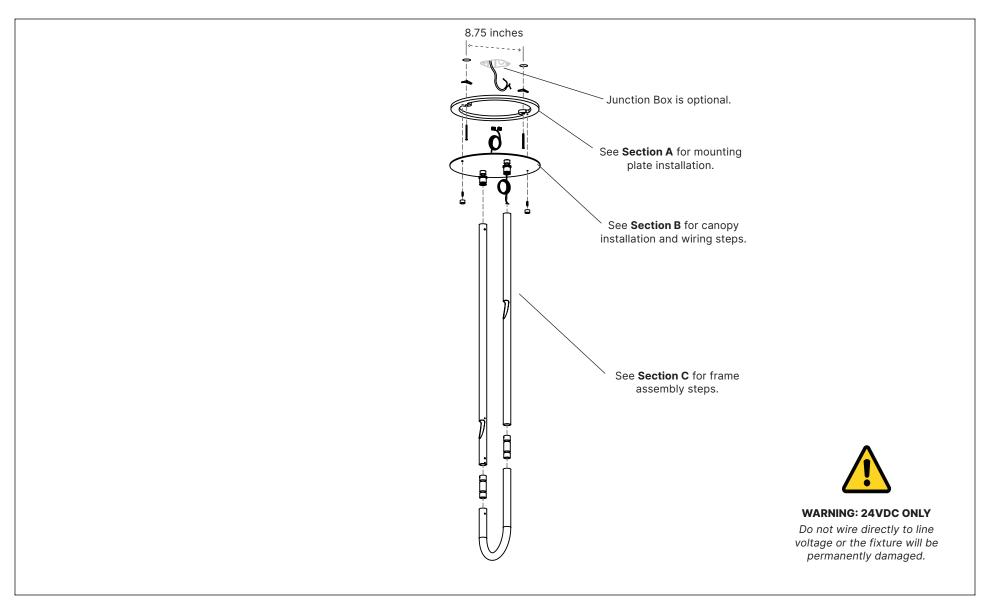


## Section A: Mounting Plate Installation

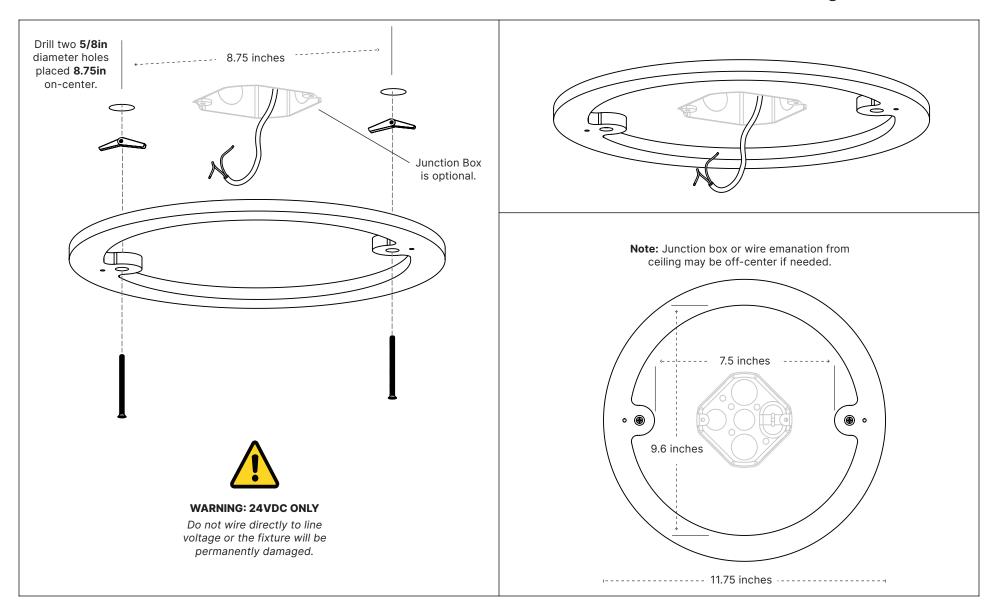


Section B: Canopy Installation

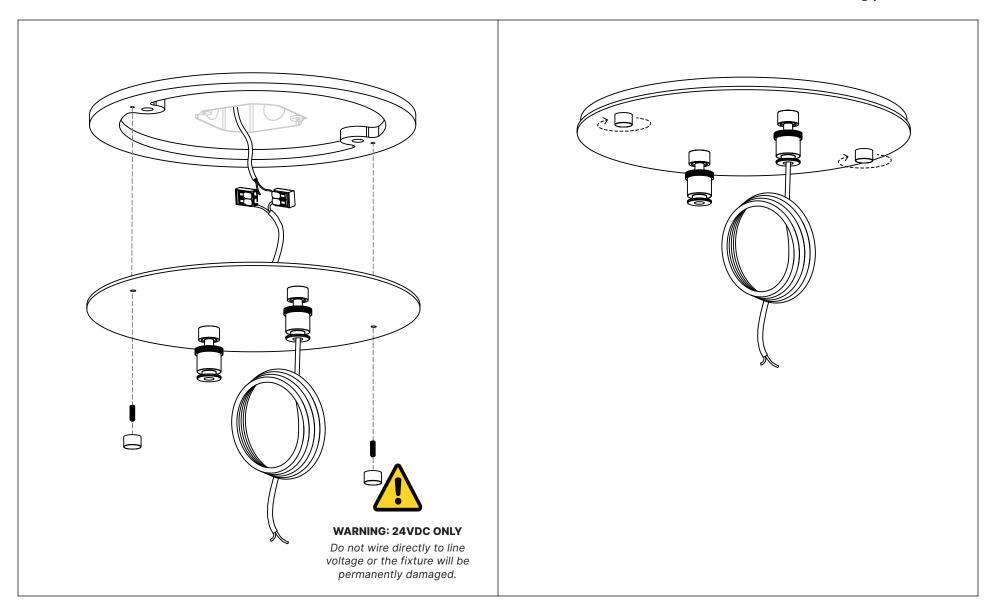


Section C: Frame Assembly

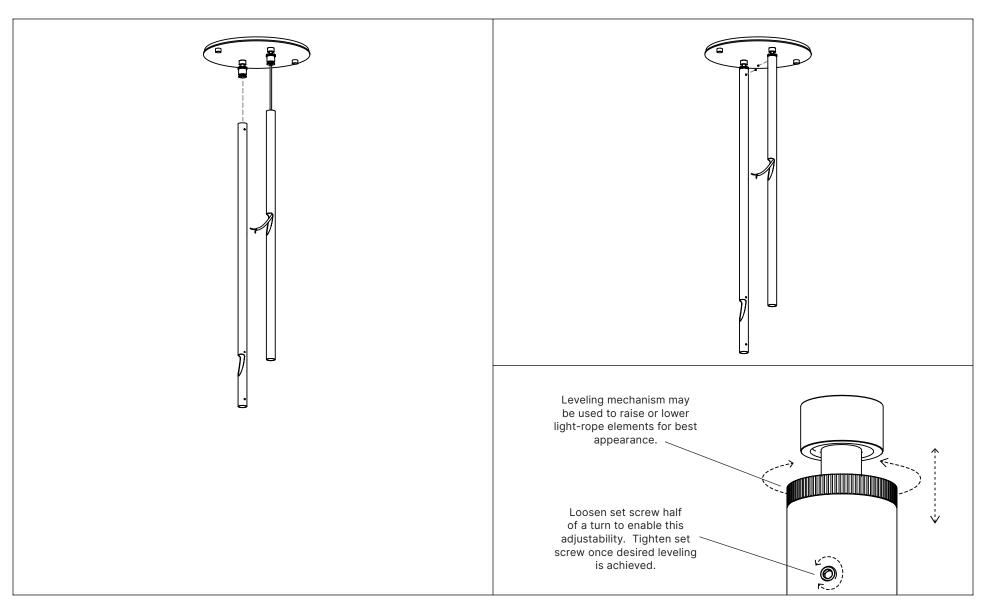

# Section C: Frame Assembly

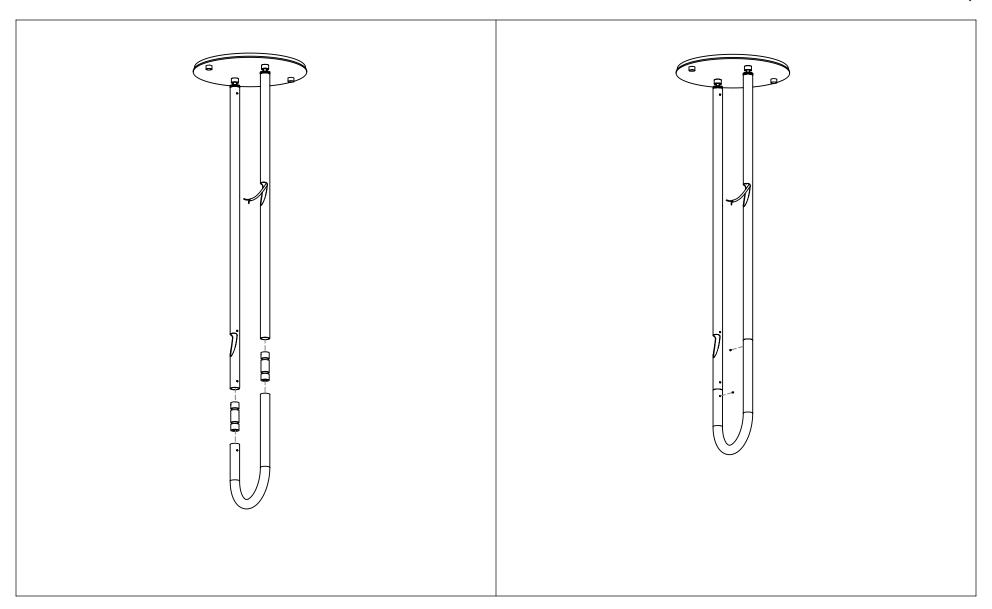

# Rope Installation

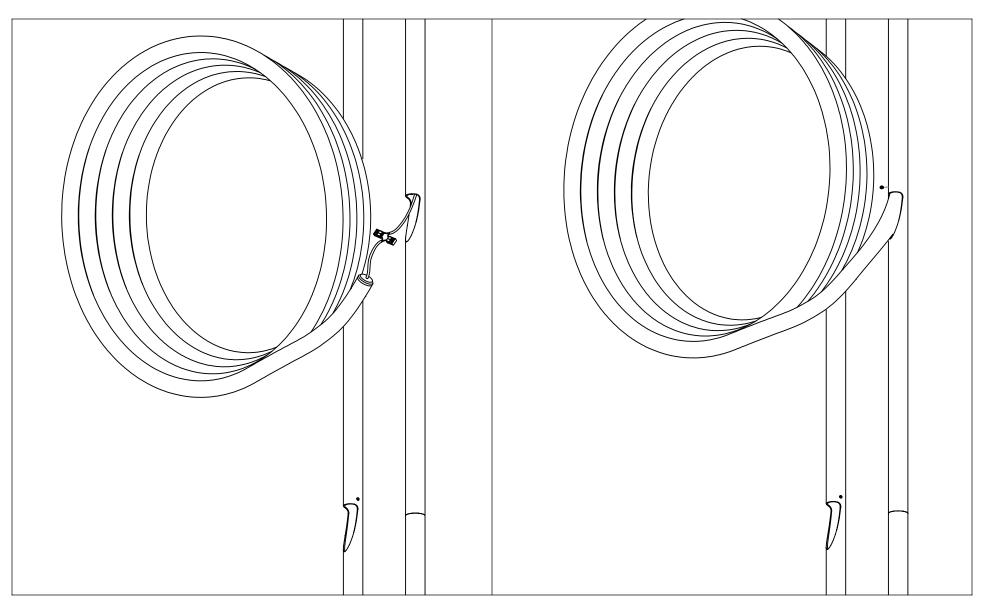

# Rope Installation

