



#### POWER REQUIREMENTS

22W @ 24VDC

One Class 2 LED driver required.

DO NOT CONNECT DIRECTLY TO LINE VOLTAGE!


#### MOUNTING

Fixture can be mounted directly to a hollow ceiling. Two mounting points (48" on center). One requires power, one is for suspension only. Fixture weighs less than 10 pounds.

#### TECHNICAL SUPPORT

Scan the QR code to view the fixture in 3D!  
Call us at the number below if you need help.

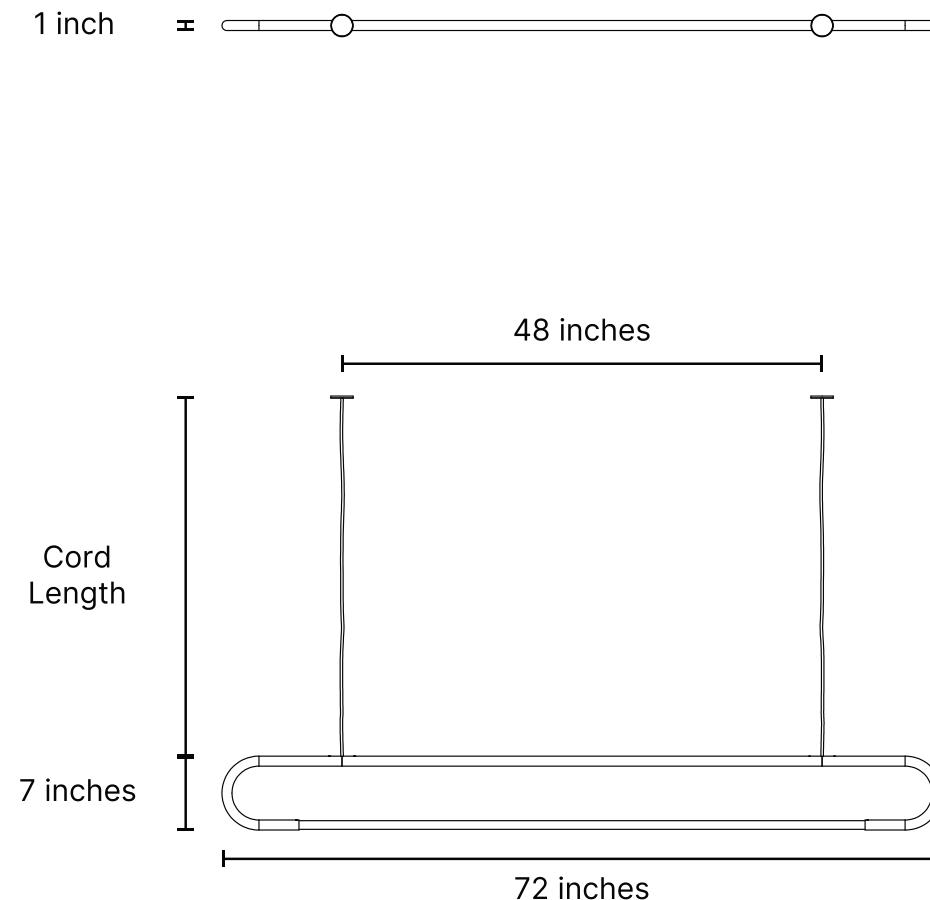

**THIS IS A LOW VOLTAGE (24VDC) FIXTURE.**

*Do not wire this fixture directly to line voltage! This fixture requires a 24VDC Class 2 Transformer (LED Driver). The 24VDC driver must be mounted per the included manufacturer's instructions. Also, please ensure that the wiring system complies with NEC requirements.*

**PLEASE HANDLE WITH CARE.**

*Keep all protective sleeves in place until fixture installation is complete. Protect the rope from nearby paint and construction dust. Keep the entire fixture covered until all nearby work is completed. Failure to handle components with care may result in permanent damage.*



**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

See **Section A** for canopy installation and wiring steps.



See **Section B** for frame installation and wiring steps.

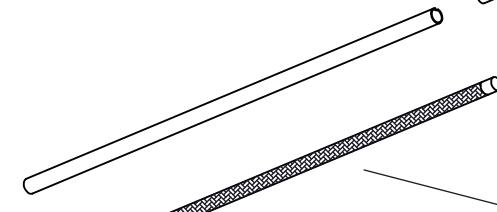

See **Section C** for rope installation steps.



**WARNING: 24VDC ONLY**

*Do not wire directly to line voltage or the fixture will be permanently damaged.*

**CONTACT US WITH ANY QUESTIONS!**



Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKELAMPCO.COM

Section A: Canopy Installation

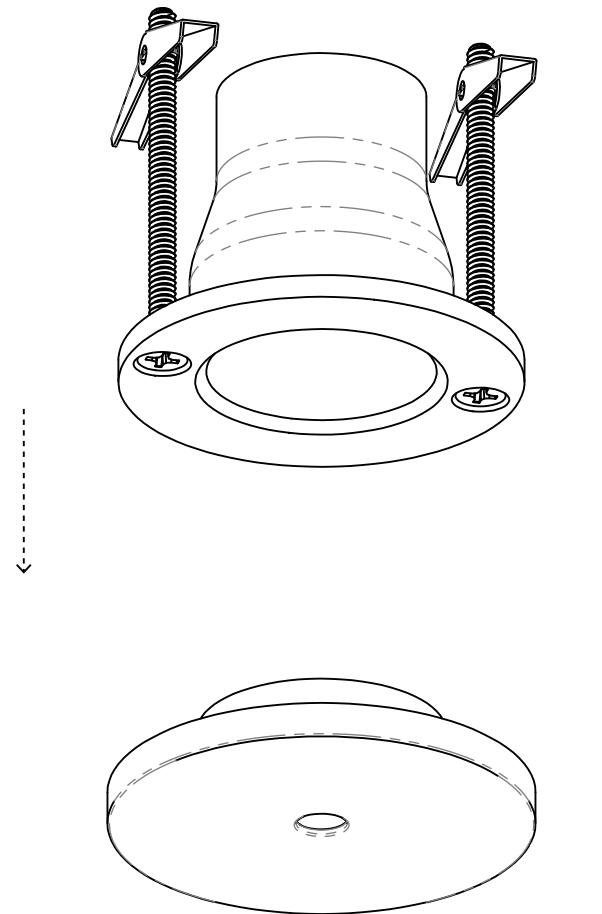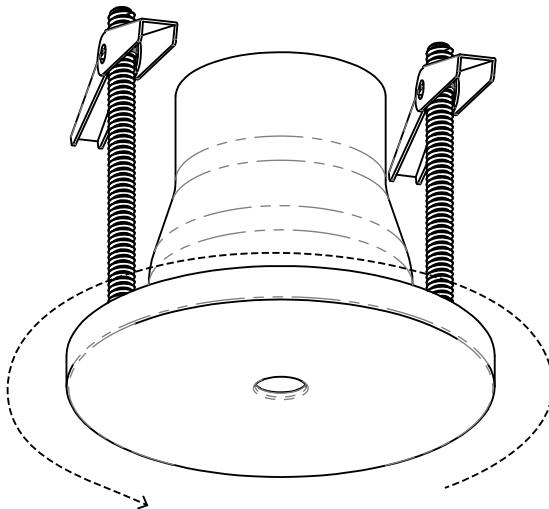





**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2


(914) 294-2024

WWW.LUKELAMPCO.COM


INFO@LUKELAMPCO.COM

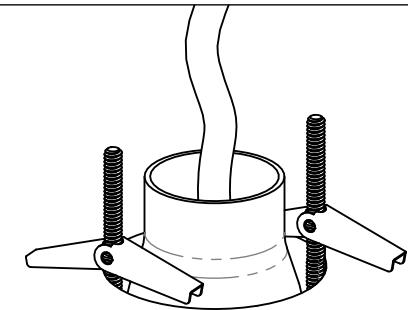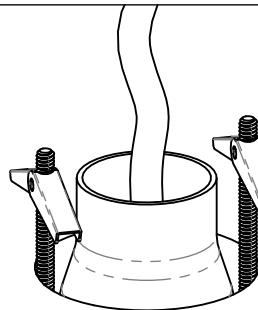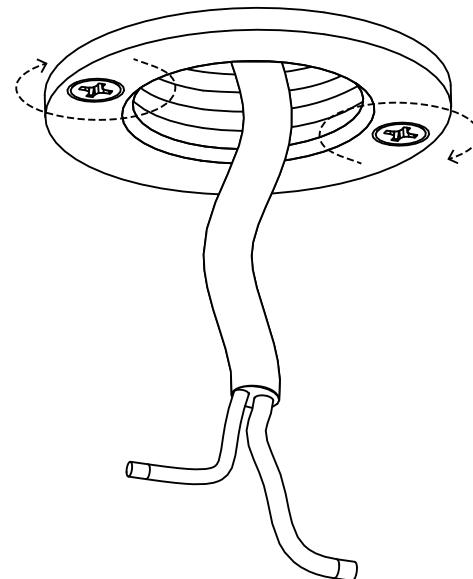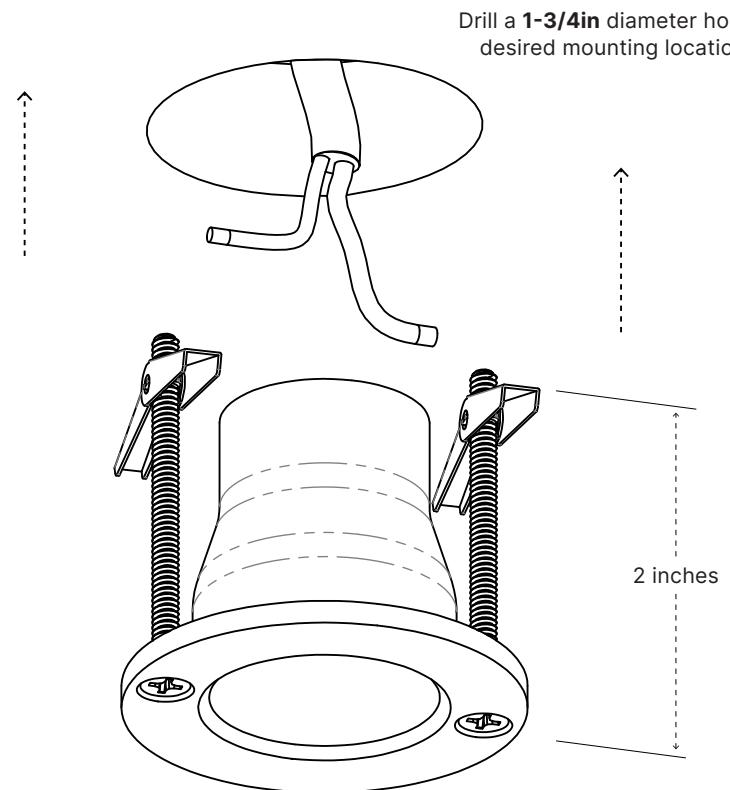


## Section A: Canopy Installation

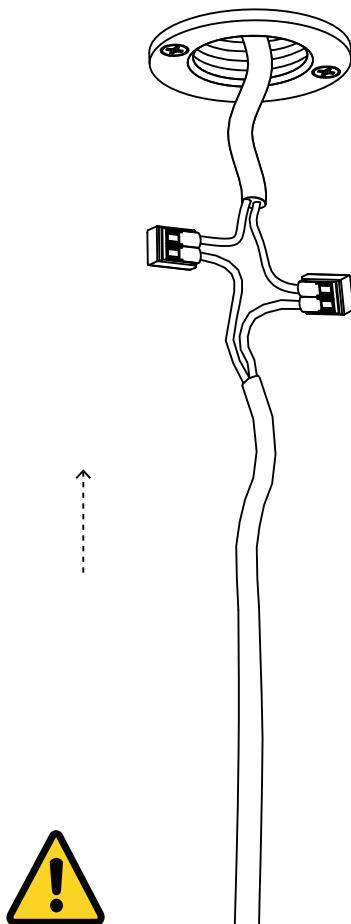


**WARNING: 24VDC ONLY**  
Do not wire directly to line voltage or the fixture will be permanently damaged.

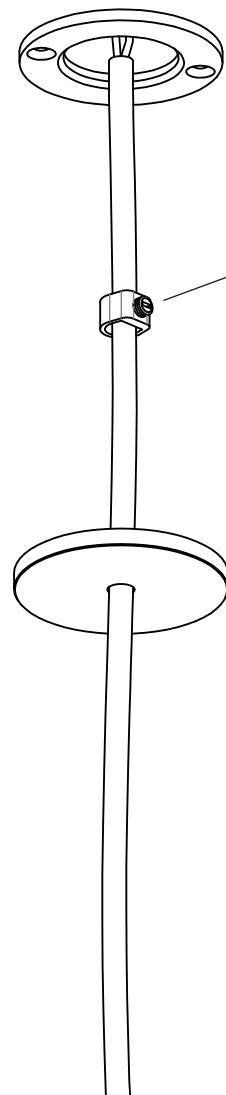

Measure cord length before tightening cord restraint.  
Trim excess cord if needed.  
Do not over-tighten cord restraint.

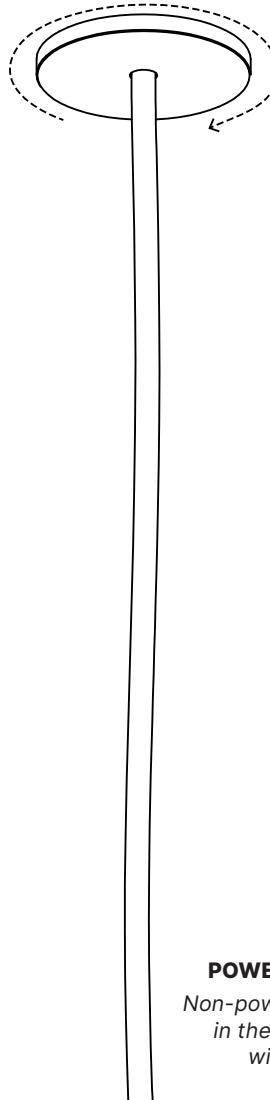

**POWERED SIDE SHOWN**  
Non-powered side assemblies in the same way, but no wiring is needed.

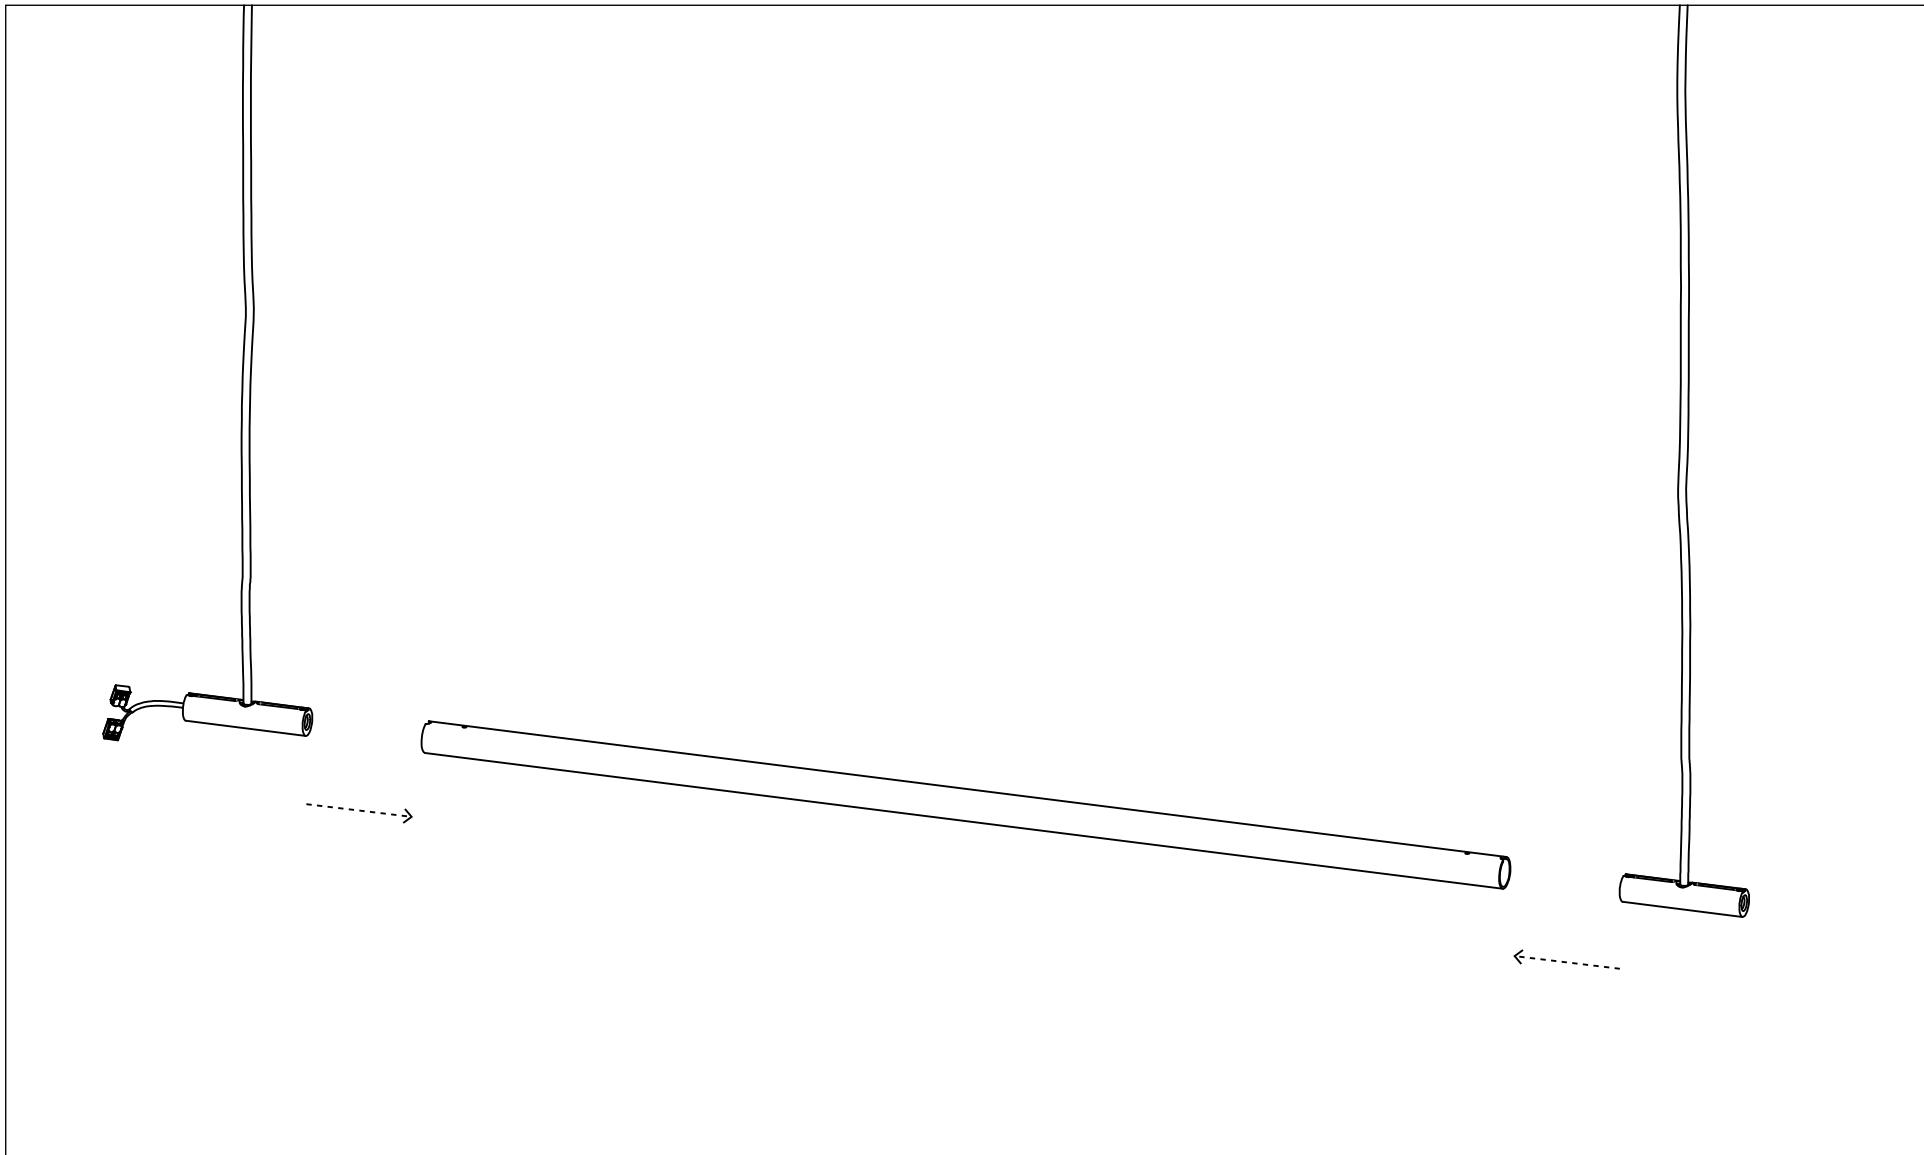


**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKELAMPCO.COM

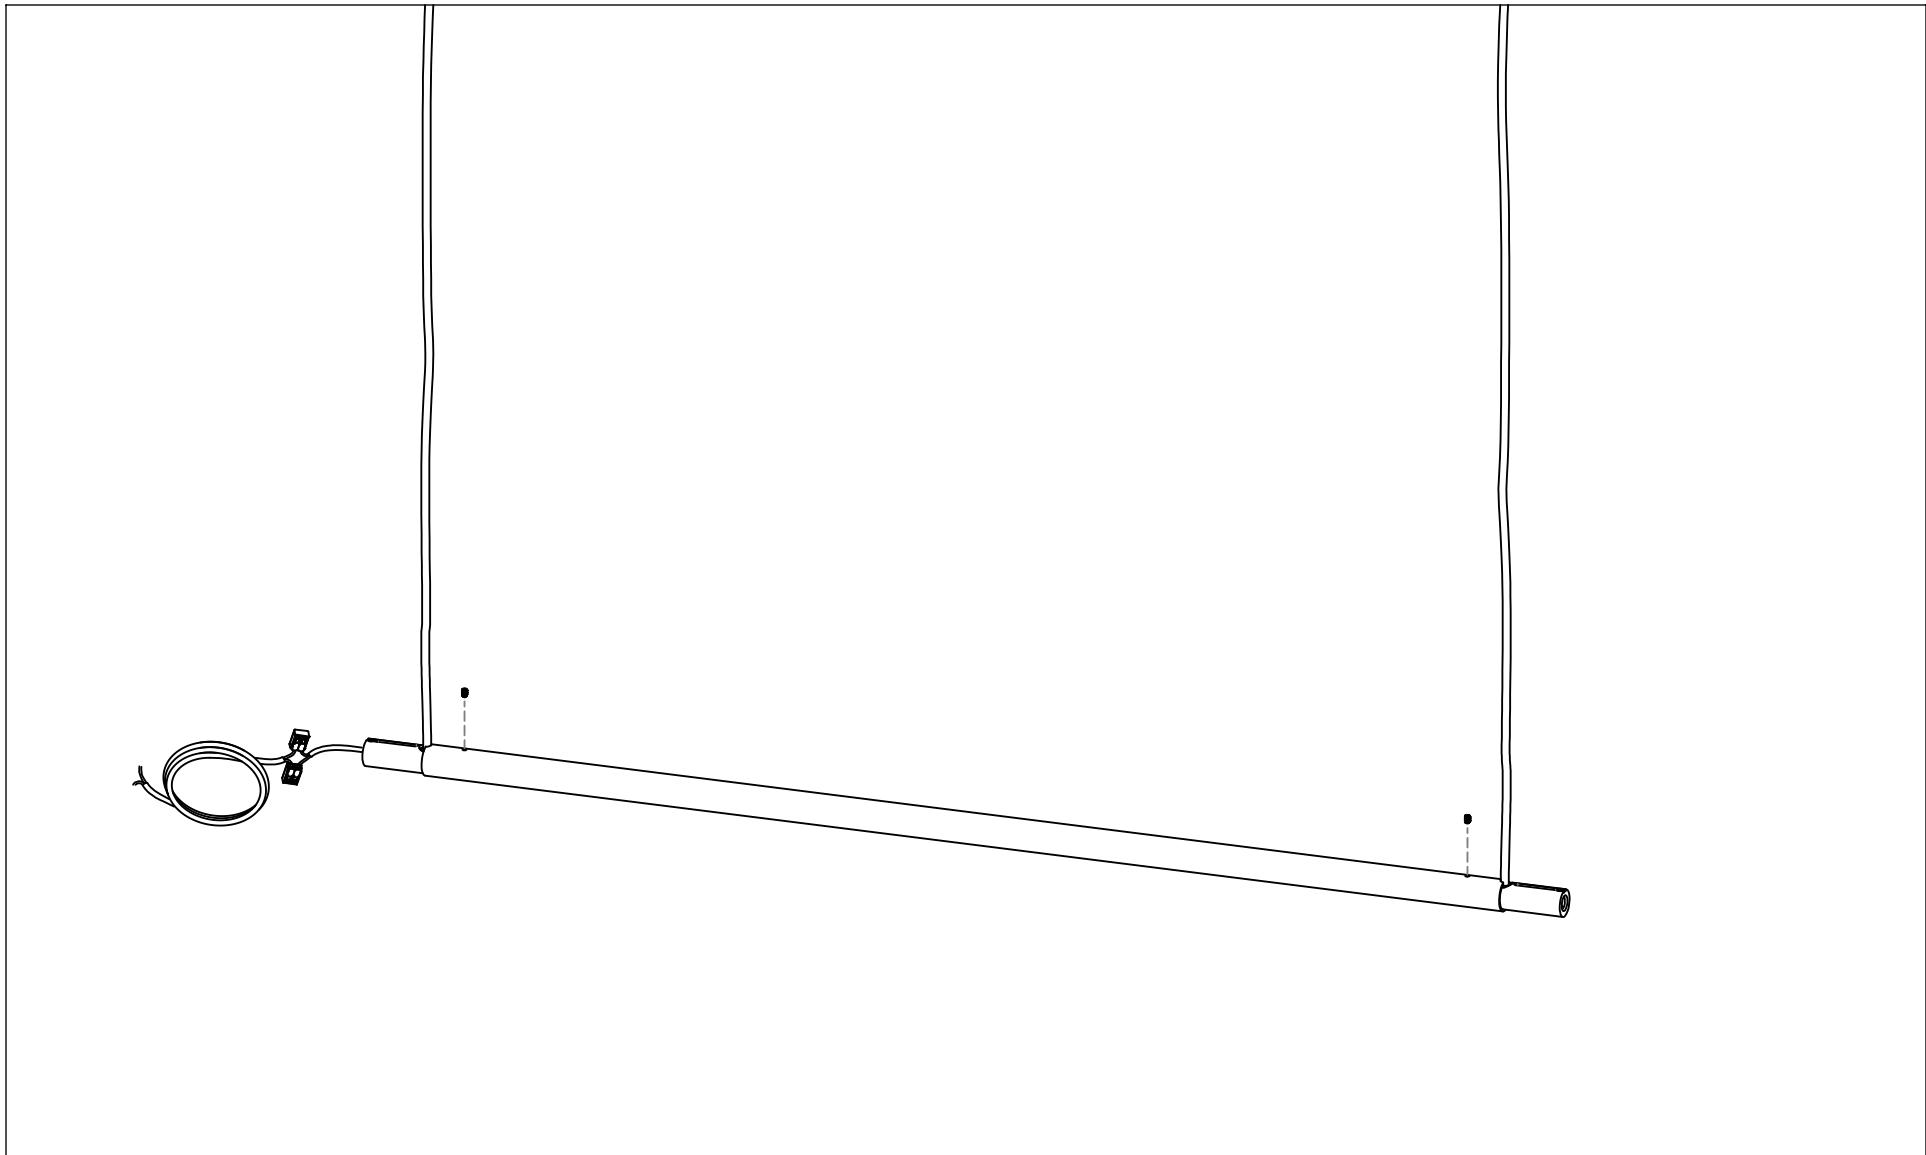


**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKEAMPCO.COM

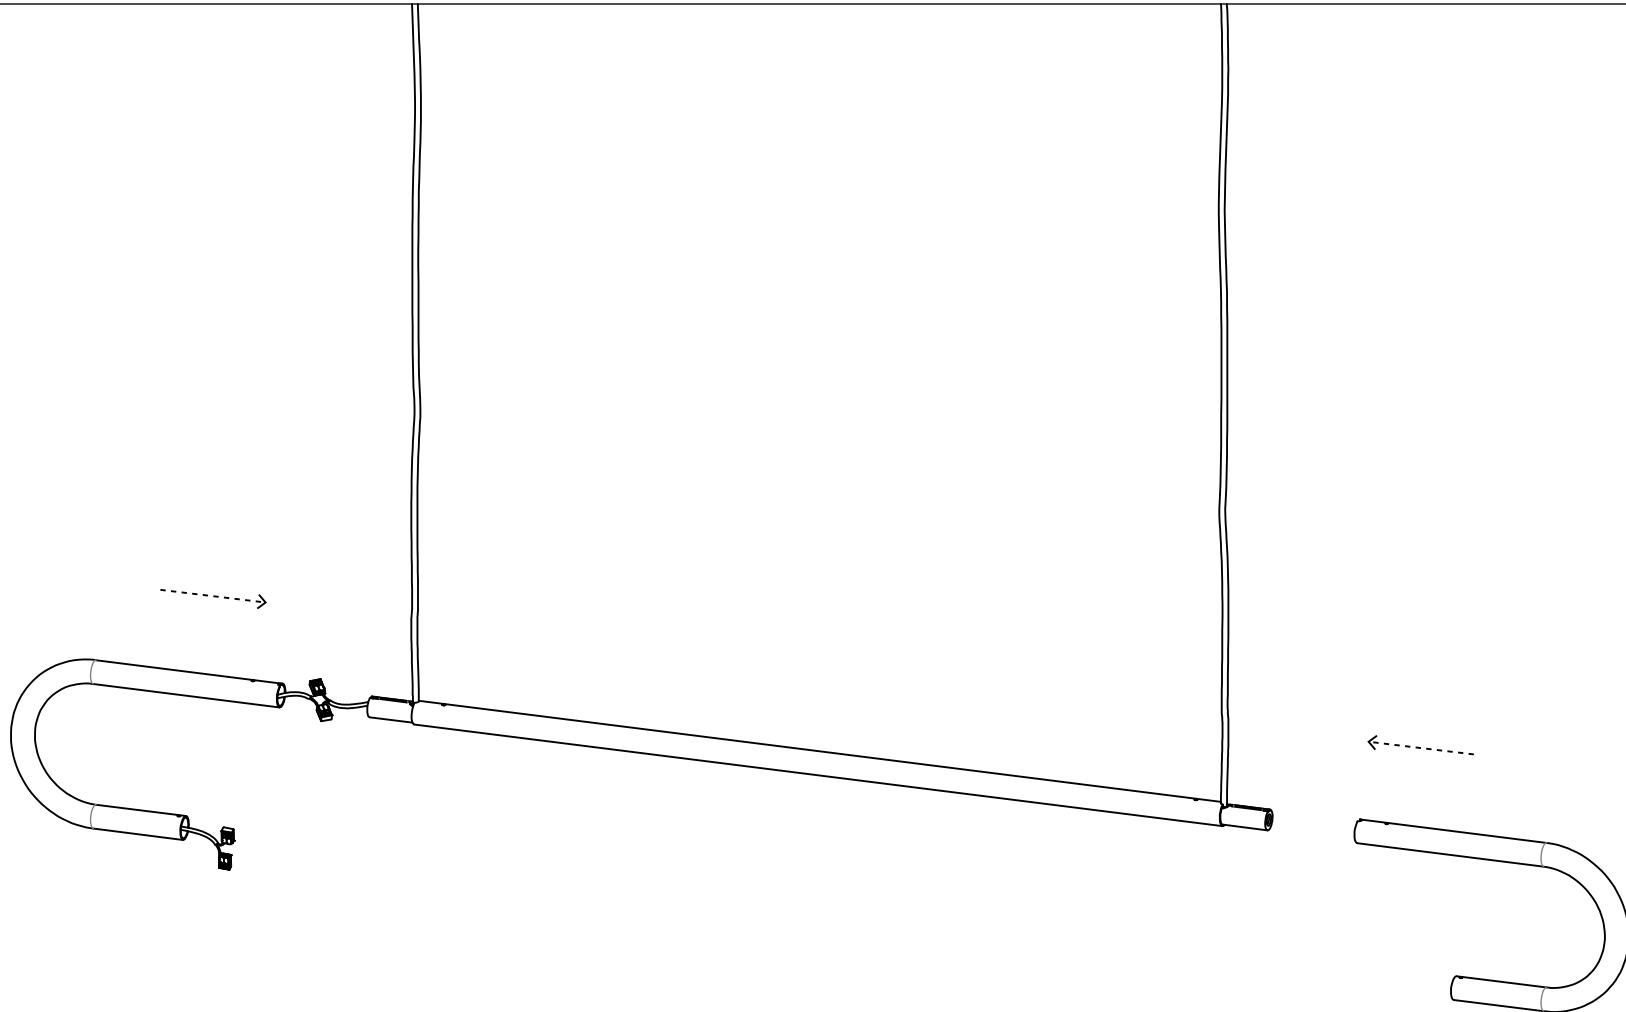


**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKELAMPCO.COM

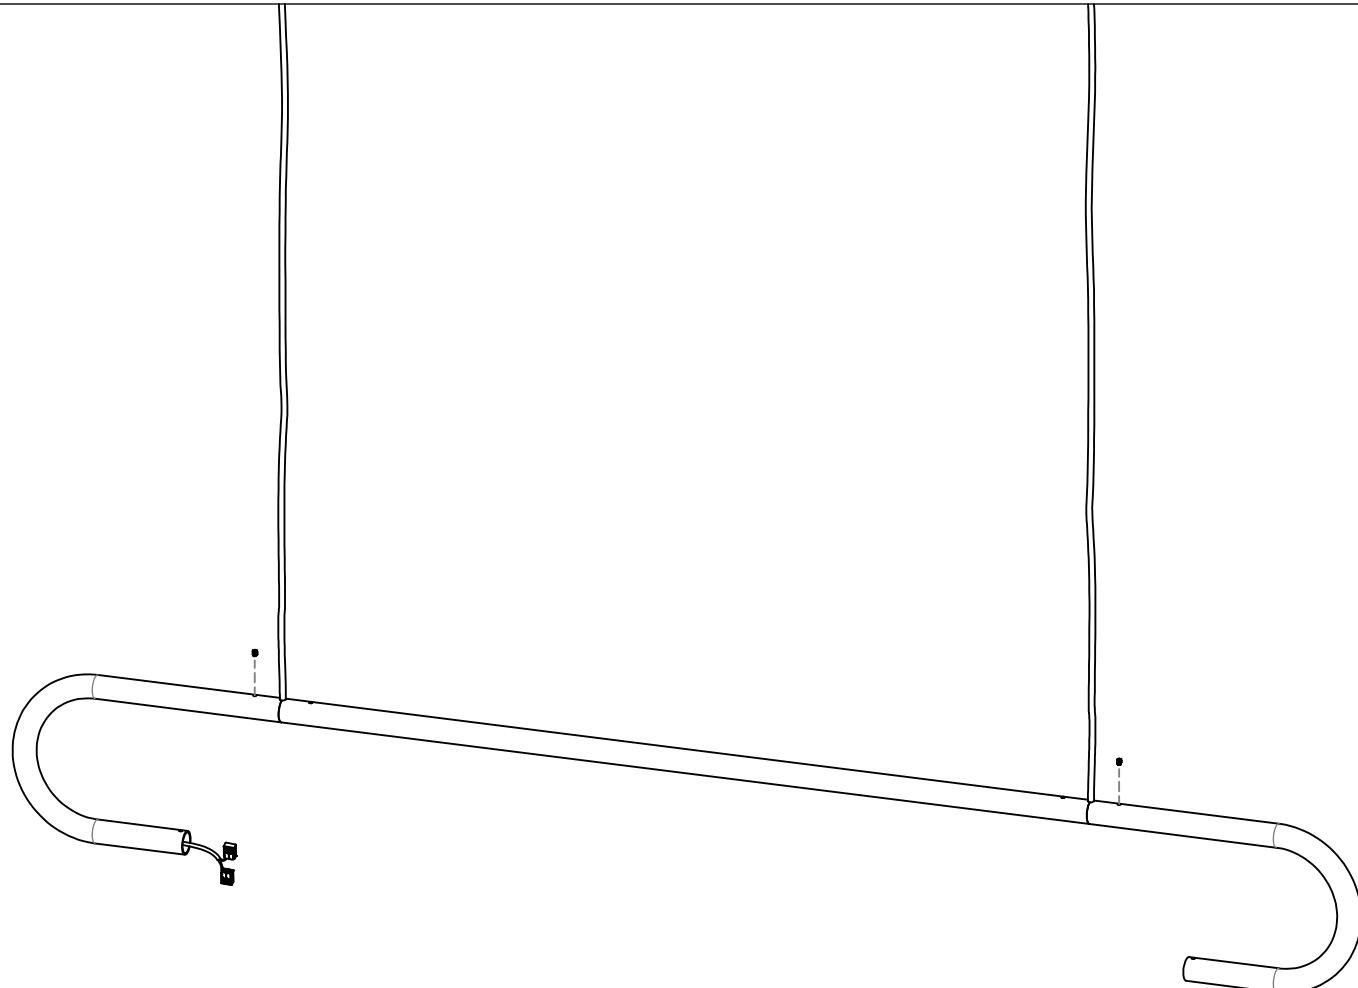


**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKELAMPCO.COM

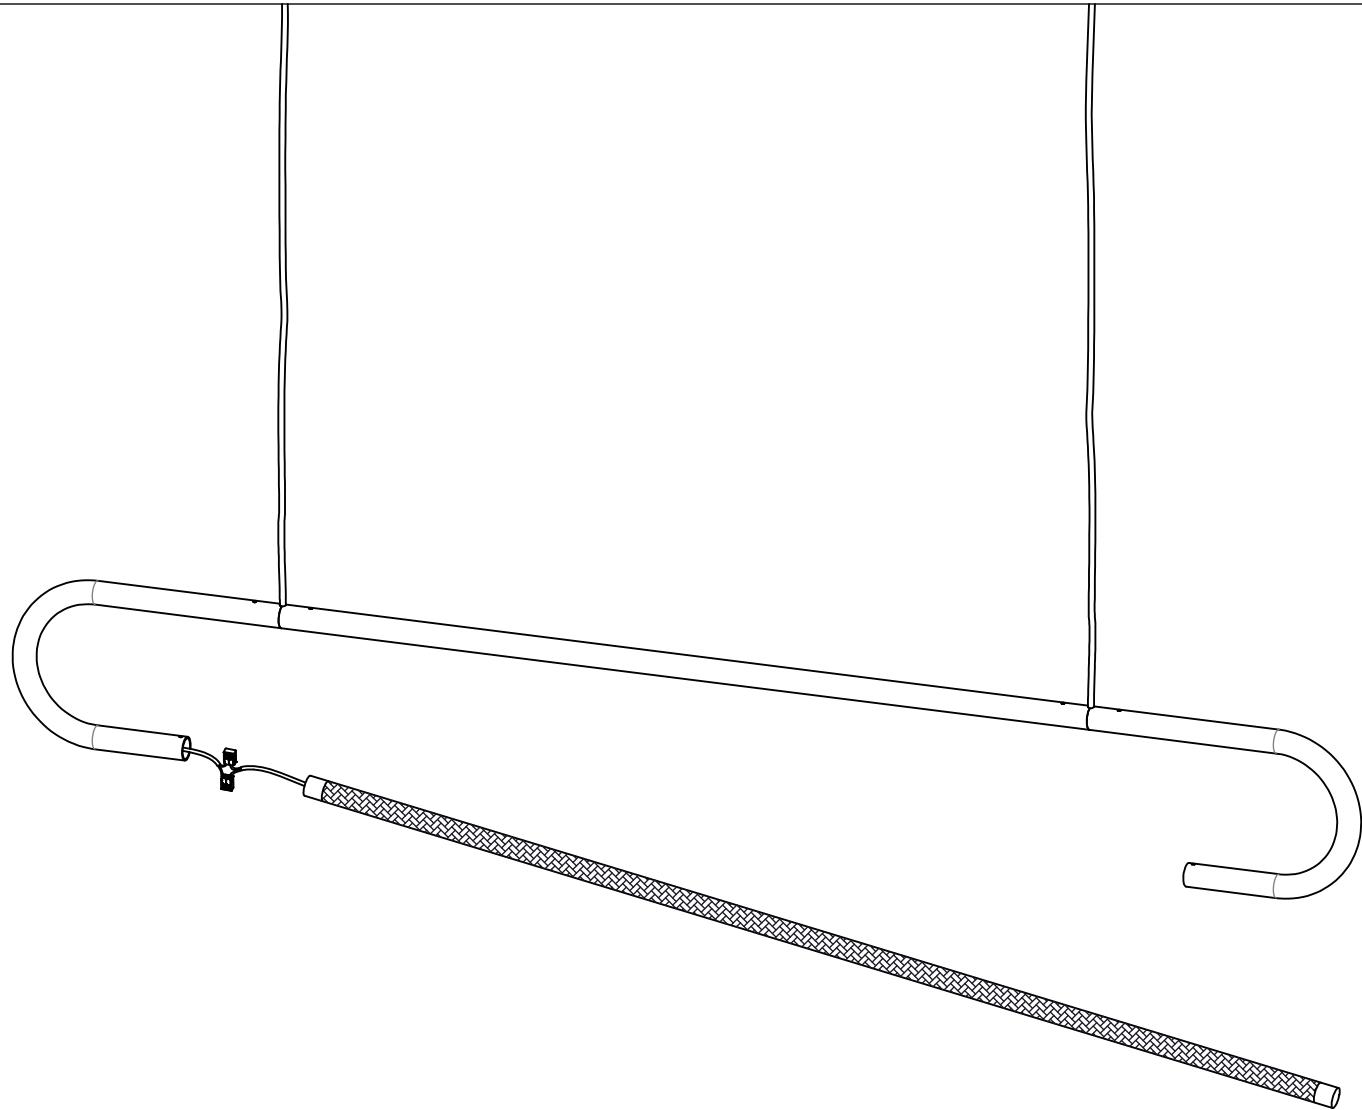


**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKELAMPCO.COM

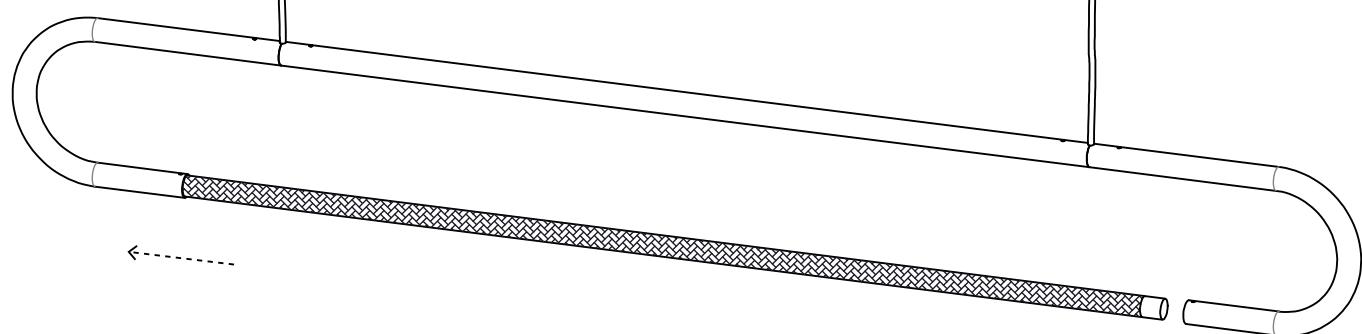


**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKELAMPCO.COM

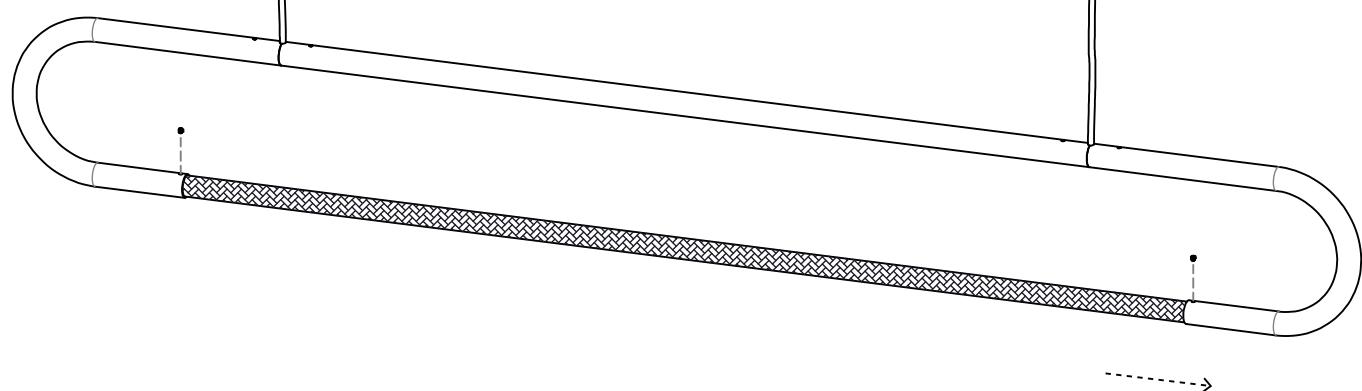

**CONTACT US WITH ANY QUESTIONS!**

Technical Support: (914) 294-2024 ext. 2

(914) 294-2024

WWW.LUKELAMPCO.COM

INFO@LUKELAMPCO.COM