
Shield Sconce 9.2 Manual

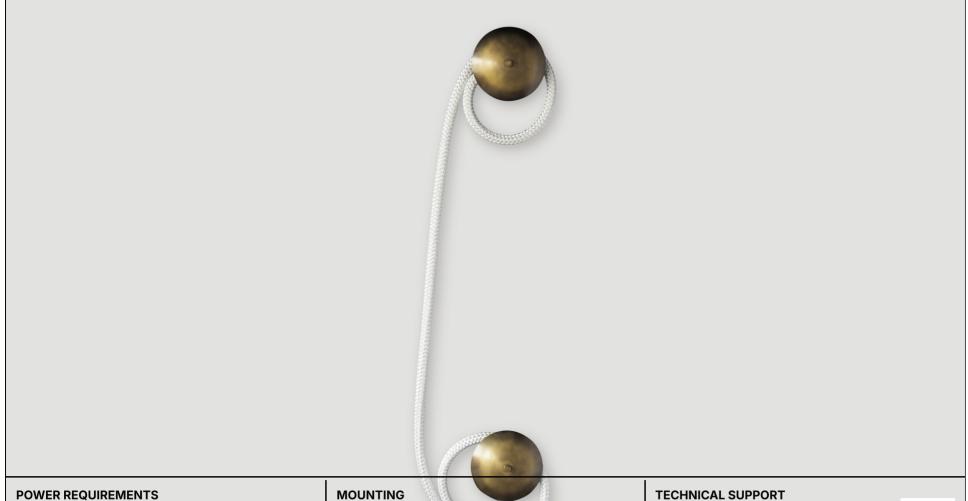


28W @ 24VDC
One Class 2 LED driver required.
DO NOT CONNECT DIRECTLY TO LINE VOLTAGE!


Fixture can mount directly to a hollow wall (toggle bolts included). Two mounting points 36" apart on center.


Adapter plate included for optional j-box mounting. Fixture weighs less than 10 pounds.


Need help styling the rope?
Scan the QR code to view the fixture in 3D!
Call us at the number below if you need help.




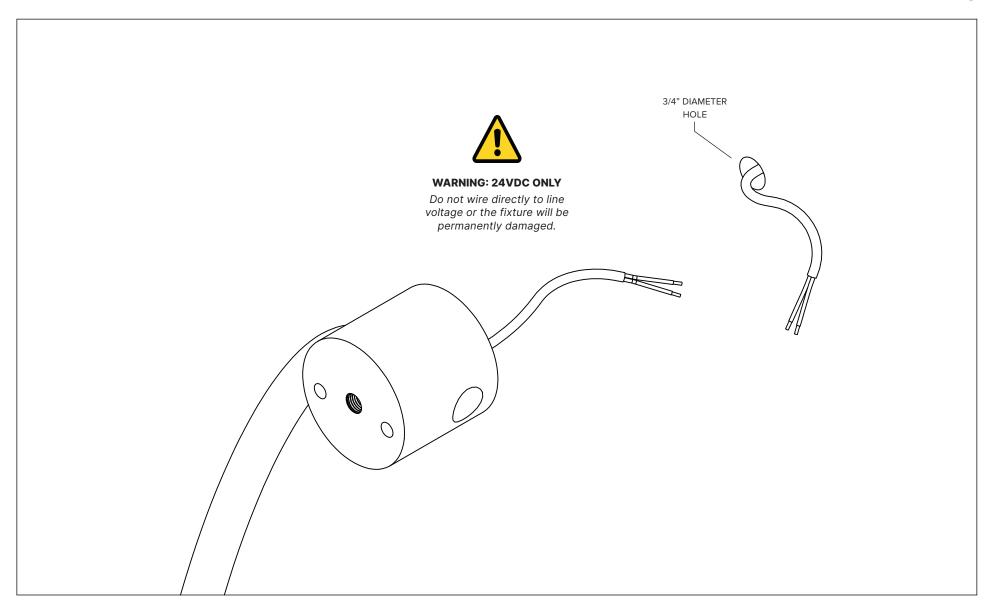


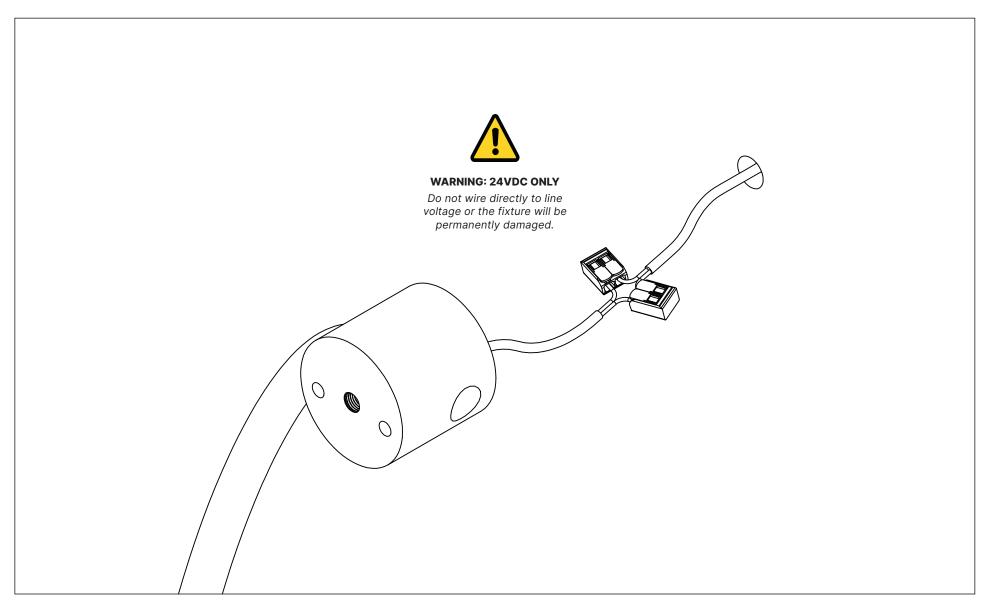


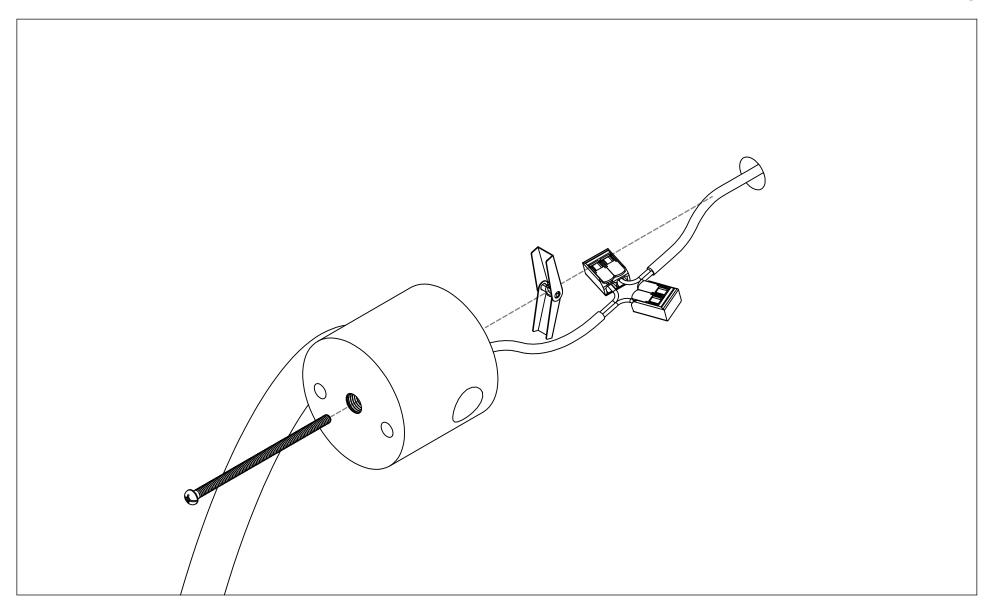

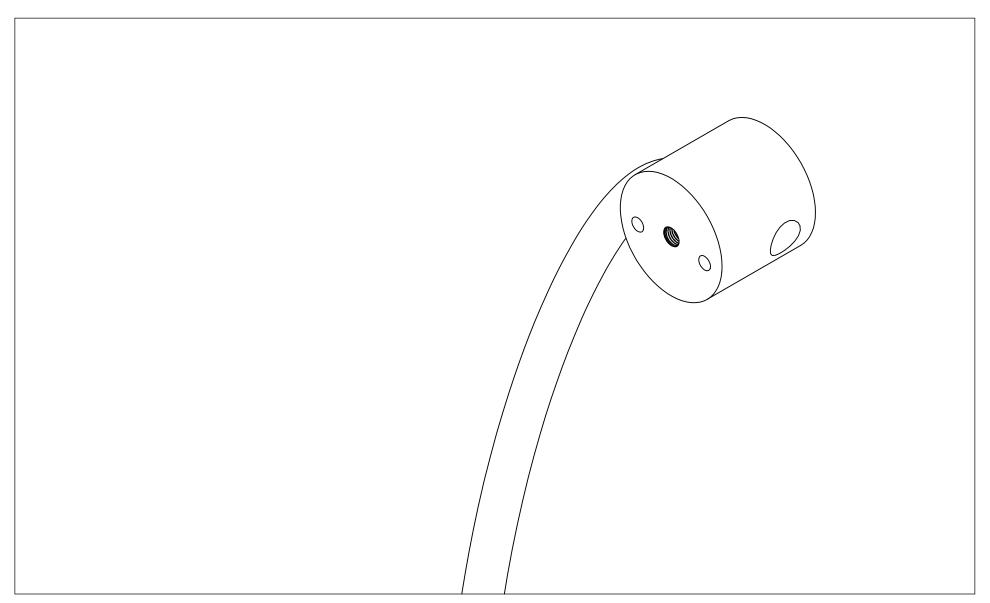


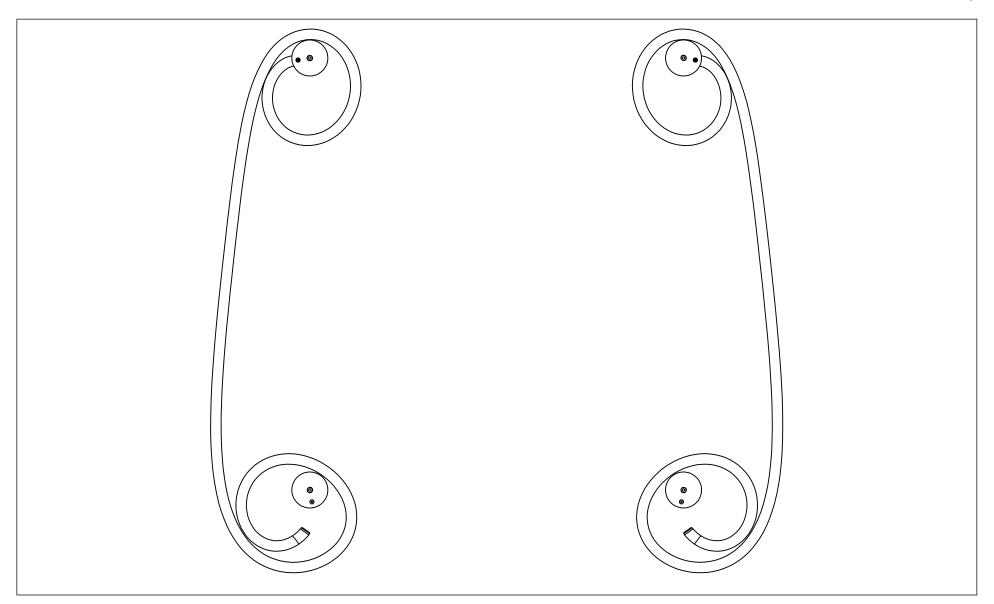

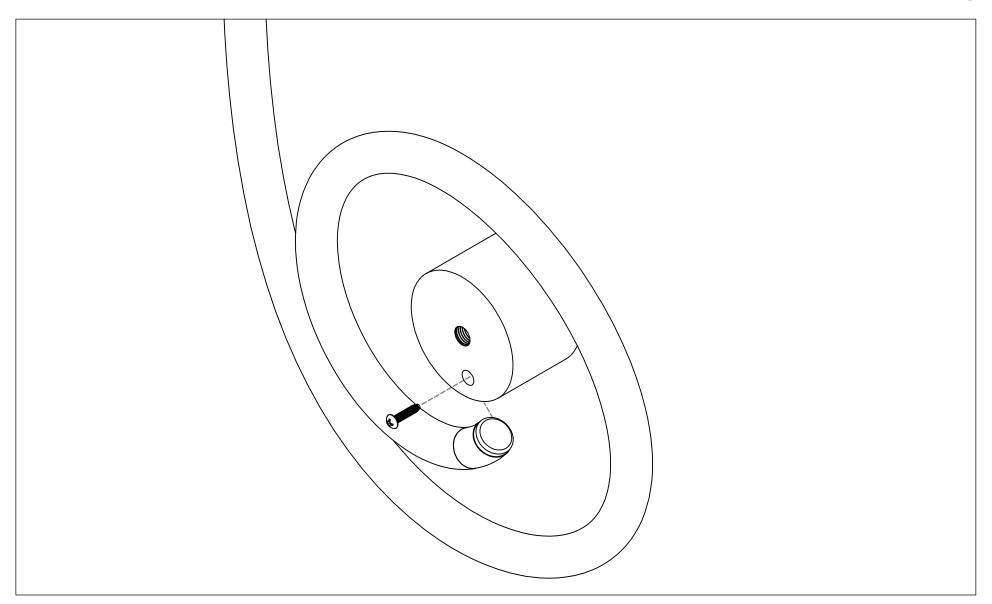

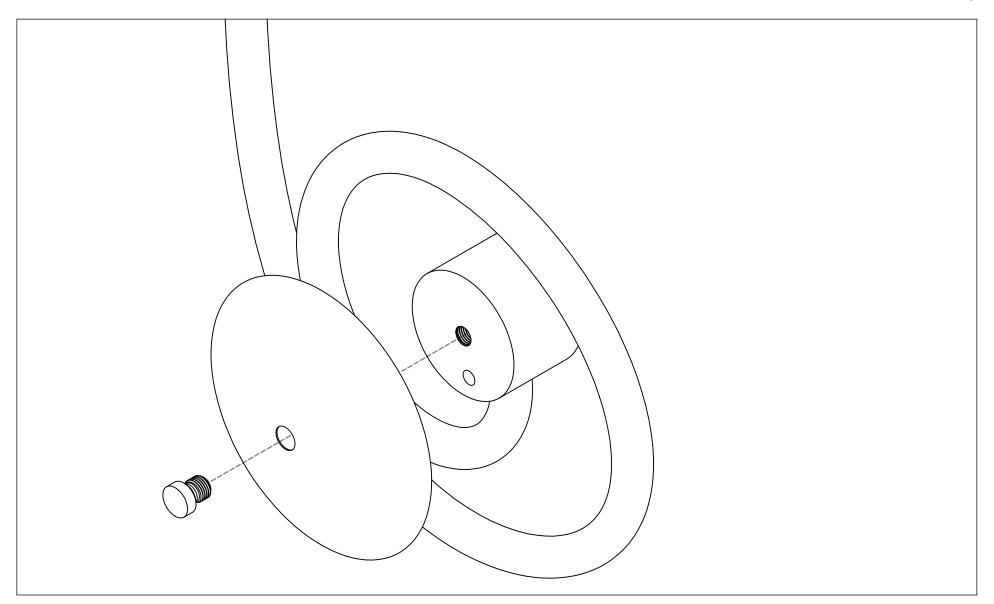

RIGHT ORIENTATION

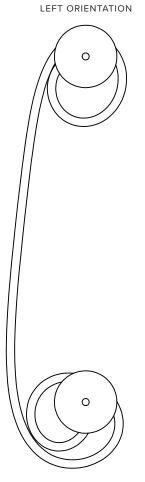



THIS IS A LOW VOLTAGE (24VDC) FIXTURE.

Do not wire this fixture directly to line voltage! The fixture requires a 24VDC Class 2 Transformer (LED Driver). The 24VDC driver must be mounted per the included manufacturer's instructions. Also, please ensure that the wiring system complies with NEC requirements.



/ λ

36" CANOPY SPACING

(Top canopy is powered, bottom is for mounting only)

PLEASE HANDLE WITH CARE.

All protective packaging should be left on the fixture (especially the clear protective sleeve that covers the rope and frame) until it is completely installed and all nearby construction is complete. Failure to do so may result in the fixture being permanently damaged.

