




This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

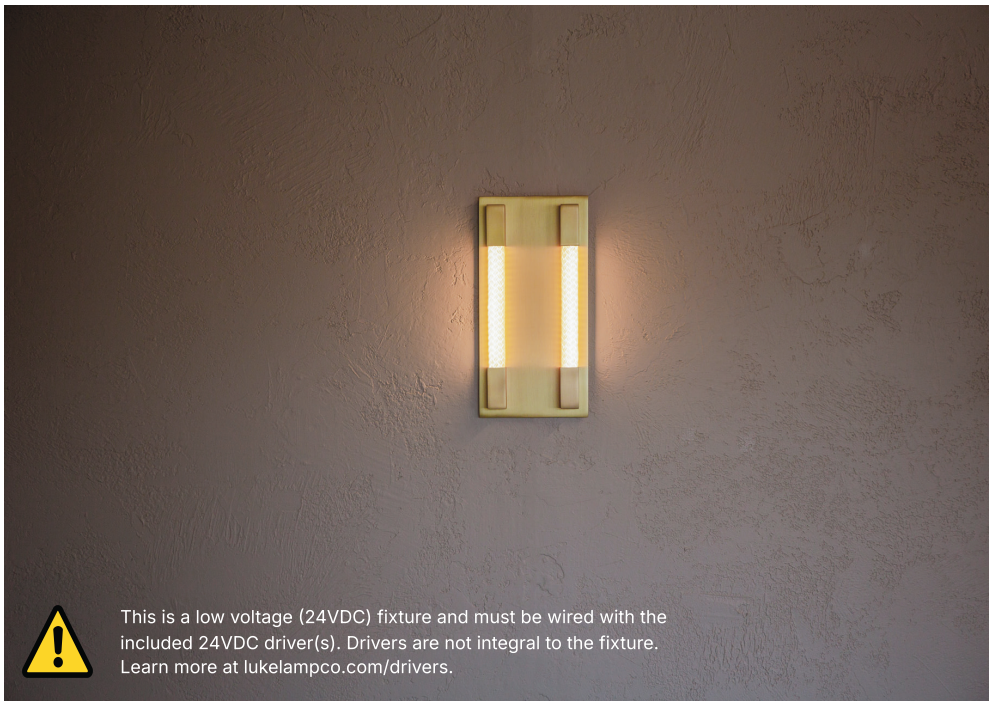

Side Detail

FIXTURE DETAILS

Dimensions

12in H x 6in W x 2in D
Weight: ~4 pounds

Mounting

Fixture can be mounted directly to any type of hollow wall. Toggle bolts are included for mounting to drywall. Junction box optional.

Light Output

236 lumens delivered. Decorative only, not a primary light source. 6W @ 24VDC

Lamping

Dimmable 24VDC integral LED. 95+ CRI. 50,000+ hour lifespan.

ADA Compliance

This fixture is ADA Compliant.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper. More at [lukelampco.com/finishes](https://www.lukelampco.com/finishes).


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

Driver

One 24VDC LED driver required. Fixture must be installed with the included driver. Driver is not integral to the fixture. More at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

DIMENSIONS

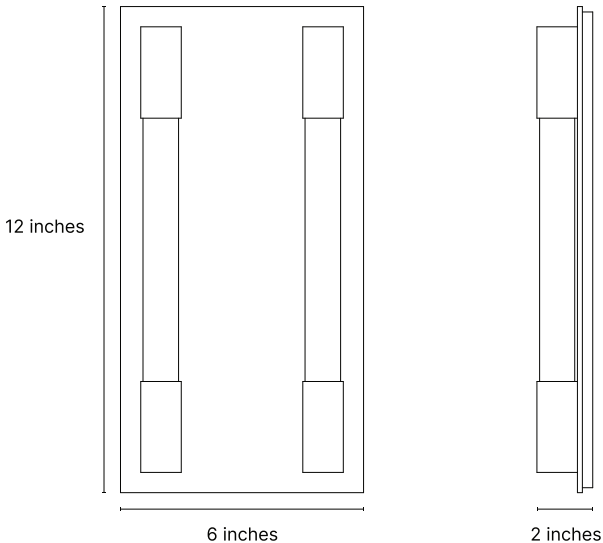

SPECIFYING CODE

FIXTURE CODE	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
12IN - RV2 - S				For indoor use only.
	SB - Satin Brass BB - Blackened Brass AB - Antique Brass SN - Satin Nickel PN - Polished Nickel SC - Satin Copper	18 - 1800K 20 - 2000K 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 50 - 5000K	UNI - Universal Remote MLV/ELV/010V (120-277V) MK - MikroDim (120V) SW - Switchex (120V) For more info, visit lukelampco.com/drivers	DR - UL Dry (Indoor) DM - UL Damp (Indoor) CR - CE Dry (Indoor)* CM - CE Damp (Indoor)* * If CE is specified, we cannot supply the drivers.