


This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](http://lukelampco.com/drivers).



Cord Canopy Detail

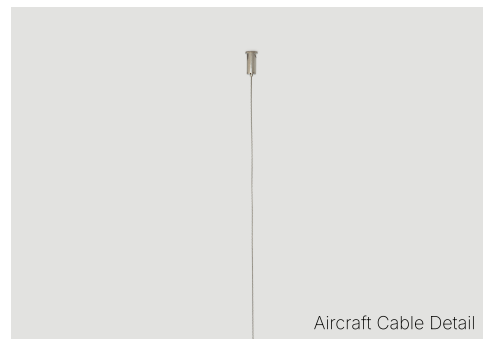

Aircraft Cable Detail

## FIXTURE DETAILS

### Dimensions

Overall: 168in L x 28in H  
Weight: ~27 pounds  
Canopy Diameter: 5 inches

### Mounting

Two junction boxes (144" on center) with a central aircraft cable for additional support. Both junction boxes require power. Two remotely mounted 24VDC drivers required.

### Light Output

5040 lumens delivered. Decorative only, not a primary light source.  
131 watts @ 24VDC.

### Lamping

Dimmable 24VDC integral LED.  
95+ CRI. 50,000+ hour lifespan.

### Cord / Cable Length

120in of field-adjustable pendant cord and aircraft cable provided. To request a custom length up to 300in, specify below.

### Finish

Satin brass, blackened brass, antique brass, satin nickel, polished nickel, & satin copper.  
For more information visit [lukelampco.com/finishes](http://lukelampco.com/finishes).




### Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

### Driver

Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit [lukelampco.com/drivers](http://lukelampco.com/drivers).

## TERMS EXPLAINED

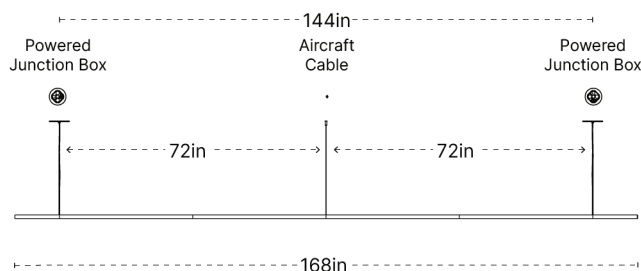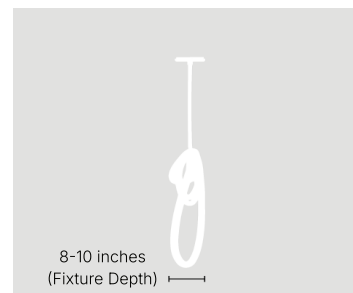

## SPECIFYING CODE

FIXTURE CODE	CORD / CABLE LENGTH	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
14FT - TB1 - FELR				UNI	For indoor use only.



Scan QR code to view instruction manual

IN - 120in of field-adjustable cord/cable included. If more is needed, up to 300in can be specified here.

**SB** - Satin Brass  
**BB** - Blackened Brass  
**AB** - Antique Brass  
**SN** - Satin Nickel  
**PN** - Polished Nickel  
**SC** - Satin Copper

**18** - 1800K  
**20** - 2000K  
**24** - 2400K  
**27** - 2700K  
**30** - 3000K  
**35** - 3500K  
**42** - 4200K  
**50** - 5000K



**UNI** - Universal Remote MLV/ELV/010V (120-277V)  
  
For more info, visit [lukelampco.com/drivers](http://lukelampco.com/drivers)

**DR** - UL Dry (Indoor)  
**DM** - UL Damp (Indoor)  
**CR** - CE Dry (Indoor)\*  
**CM** - CE Damp (Indoor)\*

\* If CE is specified, we cannot supply the drivers.