




This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at lukelampco.com/drivers.

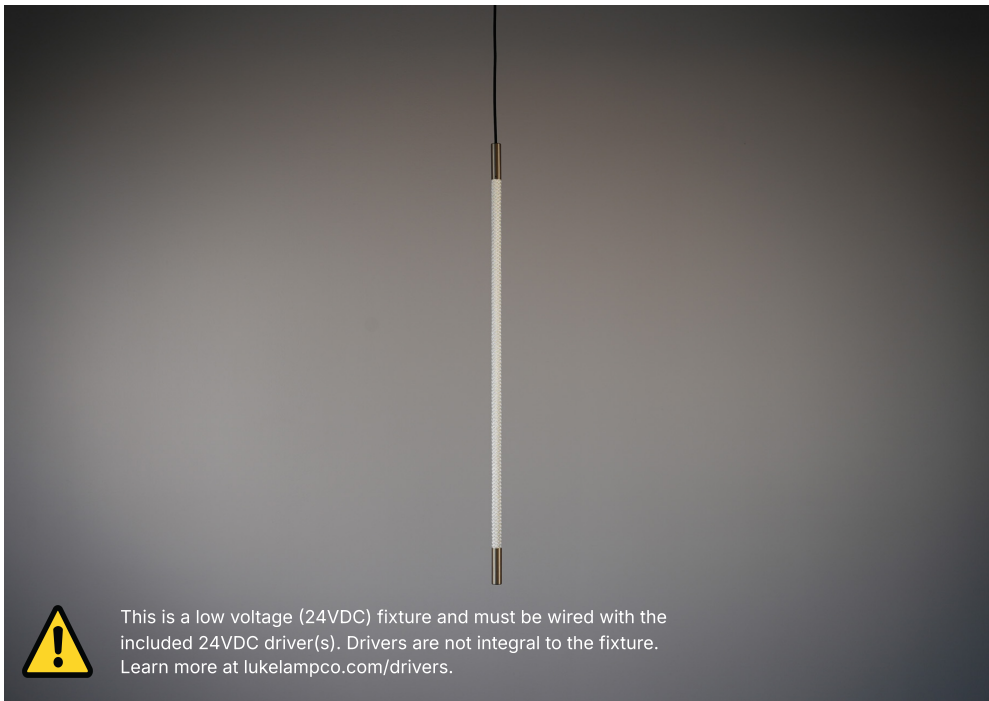

Canopy Detail

FIXTURE DETAILS

Dimensions

42in H x 1in W x 1in D
Canopy Diameter: 2.25in
Weight: ~4 pounds

Mounting

Mounts directly to hollow ceiling.
Pendant cord is field-adjustable from 6in to 120in, and up to 300in upon request. For mounting to junction boxes, please contact sales.

Light Output

374 lumens delivered. Decorative only, not a primary light source.
10W @ 24VDC

Lamping

Dimmable 24VDC integral LED.
95+ CRI. 50,000+ hour lifespan.

Cord Length

120in of field-adjustable pendant cord provided. To request a custom length up to 300in, specify below.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper.
More at lukelampco.com/finishes.


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

Driver

One 24VDC LED driver required. Fixture must be installed with the included driver. Driver is not integral to the fixture.
More at lukelampco.com/drivers.

DIMENSIONS

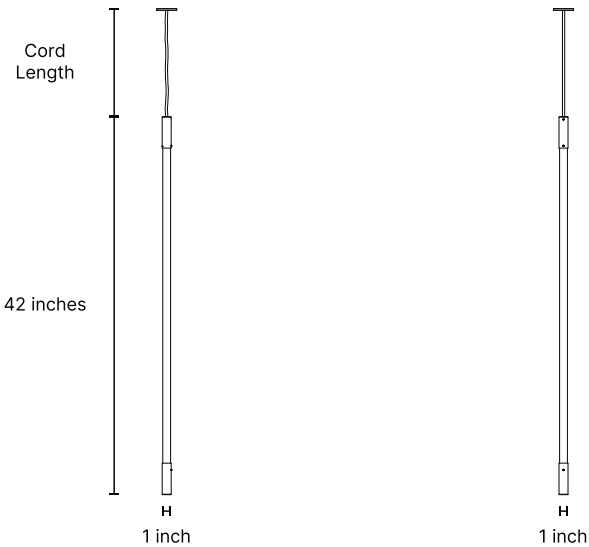

SPECIFYING CODE

FIXTURE CODE	CORD LENGTH	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
3.5FT - RE - P					For indoor use only.
	___IN - 120in of field-adjustable cord included. If more is needed, up to 300in can be specified here.	SB - Satin Brass BB - Blackened Brass AB - Antique Brass SN - Satin Nickel PN - Polished Nickel SC - Satin Copper	18 - 1800K 20 - 2000K 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 50 - 5000K	UNI - Universal Remote MLV/ELV/010V (120-277V) SW - Switchex (120V) For more info, visit lukelampco.com/drivers	DR - UL Dry (Indoor) DM - UL Damp (Indoor) CR - CE Dry (Indoor)* CM - CE Damp (Indoor)* * If CE is specified, we cannot supply the drivers.