



This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at lukelampco.com/drivers.



FIXTURE DETAILS

Dimensions

Overall: 54in H x 15in W x 10in D
Weight: ~18 pounds
Canopy Size: 15in x 10in

Mounting

Fixture can be mounted directly to any type of hollow ceiling. Toggle bolts are included for mounting to drywall. Junction box optional.

Light Output

1811 lumens delivered. Decorative only, not a primary light source.
47 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED.
95+ CRI. 50,000+ hour lifespan.

Fixture Height

Fixture height is not field adjustable. Sizes from 3ft to 6ft are available in 6in increments. For sizes longer than 6ft, inquire about rod suspension.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper. For more information visit lukelampco.com/finishes.


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

Driver

Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit lukelampco.com/drivers.

DIMENSIONS

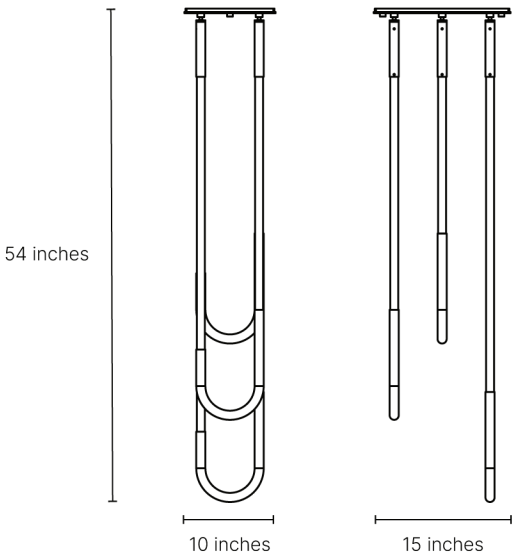

SPECIFYING CODE

FIXTURE CODE	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
4.5FT - CAP - 3.3L				For indoor use only.



Scan QR code to view instruction manual

SB - Satin Brass
BB - Blackened Brass
AB - Antique Brass
SN - Satin Nickel
PN - Polished Nickel
SC - Satin Copper

18 - 1800K
20 - 2000K
24 - 2400K
27 - 2700K
30 - 3000K
35 - 3500K
42 - 4200K
50 - 5000K



UNI - Universal Remote MLV/ELV/010V (120-277V)
MK - MikroDim (120V)
SW - Switchex (120V)

For more info, visit lukelampco.com/drivers

DR - UL Dry (Indoor)
DM - UL Damp (Indoor)
CR - CE Dry (Indoor)*
CM - CE Damp (Indoor)*

* If CE is specified, we cannot supply the drivers.