

4.5ft Trellis Pendant 1.1C



This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).



Canopy Detail

FIXTURE DETAILS

Dimensions

Overall: 54in H x 12in W x 12in D  
Weight: ~12 pounds  
Canopy Diameter: 12in

Mounting

Fixture can be mounted directly to any type of hollow ceiling. Toggle bolts are included for mounting to drywall. Junction box optional.

Light Output

492 lumens delivered. Decorative only, not a primary light source.  
13 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED.  
95+ CRI. 50,000+ hour lifespan.

Fixture Height

Fixture height is not field adjustable. Sizes from 3ft to 6ft are available in 6in increments. For sizes longer than 6ft, inquire about rod suspension.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper. For more information visit [lukelampco.com/finishes](https://www.lukelampco.com/finishes).

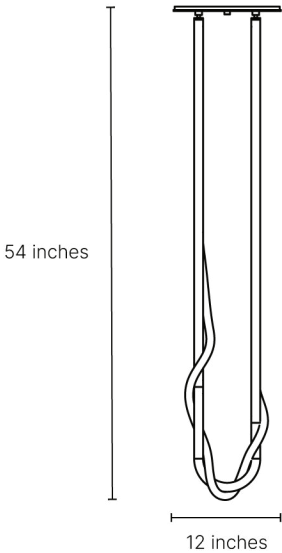
Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.



Driver

Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

DIMENSIONS



SPECIFYING CODE

FIXTURE CODE	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
4.5FT - TRP - 1.1C				For indoor use only.
	<b>SB</b> - Satin Brass <b>BB</b> - Blackened Brass <b>AB</b> - Antique Brass <b>SN</b> - Satin Nickel <b>PN</b> - Polished Nickel <b>SC</b> - Satin Copper	<b>18</b> - 1800K <b>20</b> - 2000K <b>24</b> - 2400K <b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>42</b> - 4200K <b>50</b> - 5000K	 <b>UNI</b> - Universal Remote MLV/ELV/010V (120-277V) <b>MK</b> - MikroDim (120V) <b>SW</b> - Switchex (120V)  For more info, visit <a href="https://www.lukelampco.com/drivers">lukelampco.com/drivers</a>	<b>DR</b> - UL Dry (Indoor) <b>DM</b> - UL Damp (Indoor) <b>CR</b> - CE Dry (Indoor)* <b>CM</b> - CE Damp (Indoor)*  * If CE is specified, we cannot supply the drivers.

Scan QR code to view instruction manual