



This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).



Canopy Detail

FIXTURE DETAILS

Dimensions

Overall: 66in H x 12in W x 12in D
Weight: ~12 pounds
Canopy Diameter: 12in

Mounting

Fixture can be mounted directly to any type of hollow ceiling. Toggle bolts are included for mounting to drywall. Junction box optional.

Light Output

492 lumens delivered. Decorative only, not a primary light source.
13 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED.
95+ CRI. 50,000+ hour lifespan.

Fixture Height

Fixture height is not field adjustable. Sizes from 3ft to 6ft are available in 6in increments. For sizes longer than 6ft, inquire about rod suspension.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper. For more information visit [lukelampco.com/finishes](https://www.lukelampco.com/finishes).

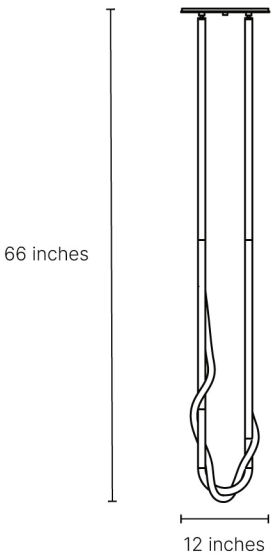
Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.



Driver

Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

DIMENSIONS



SPECIFYING CODE

FIXTURE CODE	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
5.5FT - TRP - 1.1C				For indoor use only.
	SB - Satin Brass BB - Blackened Brass AB - Antique Brass SN - Satin Nickel PN - Polished Nickel SC - Satin Copper	18 - 1800K 20 - 2000K 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 50 - 5000K	 UNI - Universal Remote MLV/ELV/010V (120-277V) MK - MikroDim (120V) SW - Switchex (120V) For more info, visit lukelampco.com/drivers	DR - UL Dry (Indoor) DM - UL Damp (Indoor) CR - CE Dry (Indoor)* CM - CE Damp (Indoor)* * If CE is specified, we cannot supply the drivers.

Scan QR code to view instruction manual