



Rod Canopy Detail



Aircraft Cable Detail



This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

FIXTURE DETAILS

Dimensions

Overall: 72in L x 33in H
Weight: ~20 pounds
Canopy Diameter: 5 inches

Mounting

Single junction box centered on the fixture. Two standalone aircraft cables spaced 48" apart.

Light Output

2560 lumens delivered. Decorative only, not a primary light source.
67 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED.
95+ CRI. 50,000+ hour lifespan.

Vertical Rod Height

6in to 72in, cut to order. Lengths up to 144in available for an additional charge.

Finish

Satin brass, blackened brass, antique brass, satin nickel, polished nickel, & satin copper.
For more information visit [lukelampco.com/finishes](https://www.lukelampco.com/finishes).


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

Driver

Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

TERMS EXPLAINED

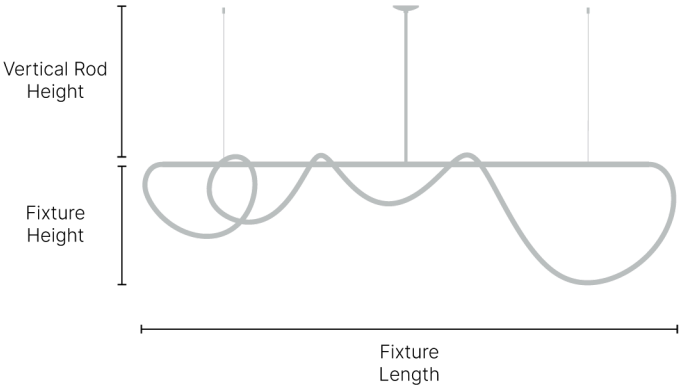

SPECIFYING CODE

FIXTURE CODE	VERTICAL ROD HEIGHT	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
6FT - TB - 3.9					For indoor use only.



Scan QR code to view instruction manual

_IN - 6in to 72in, cut to order. Lengths up to 144in available for an additional charge.

SB - Satin Brass
BB - Blackened Brass
AB - Antique Brass
SN - Satin Nickel
PN - Polished Nickel
SC - Satin Copper

18 - 1800K
20 - 2000K
24 - 2400K
27 - 2700K
30 - 3000K
35 - 3500K
42 - 4200K
50 - 5000K



UNI - Universal Remote MLV/ELV/010V (120-277V)
SW - Switchex (120V)

For more info, visit [lukelampco.com/drivers](https://www.lukelampco.com/drivers)

DR - UL Dry (Indoor)
DM - UL Damp (Indoor)
CR - CE Dry (Indoor)*
CM - CE Damp (Indoor)*

* If CE is specified, we cannot supply the drivers.