



This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

Right Orientation Shown



Canopy Detail

FIXTURE DETAILS

Dimensions

3in H x 10in W x 12in D
Canopy Diameter: 2.25in
Weight: ~6 pounds

Mounting

Fixture can be mounted directly to a hollow ceiling. Can be installed on ceilings with up to 30° of slope. For junction box installation, use our Essex Pendant (Right) (5in Canopy).

Light Output

383 lumens delivered. Decorative only, not a primary light source.
10W @ 24VDC

Lamping

Dimmable 24VDC integral LED.
95+ CRI. 50,000+ hour lifespan.

Vertical Rod Height

Rods available up to 12ft. Specify in inches from 6in to 144in, cut to order. Height may vary +/- 1in.

Orientation

Available in Left and Right.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper.
More at [lukelampco.com/finishes](https://www.lukelampco.com/finishes).


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

Driver

One 24VDC LED driver required. Fixture must be installed with the included driver. Driver is not integral to the fixture.
More at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

DIMENSIONS

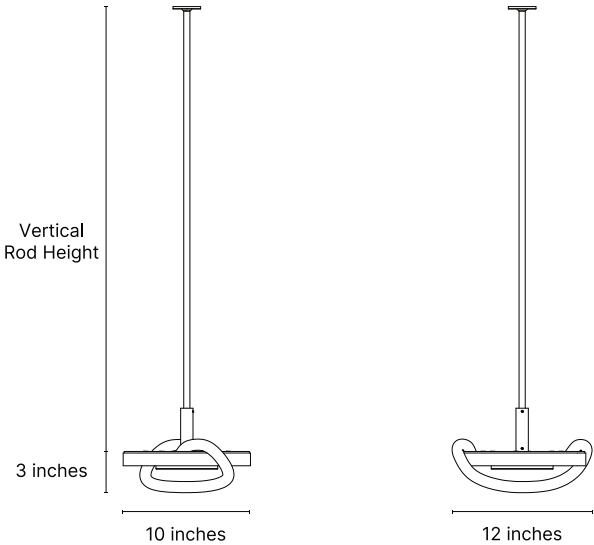

SPECIFYING CODE

FIXTURE CODE	VERTICAL ROD HEIGHT	ORIENTATION	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
ES - P - R	— IN - 6in to 144in (12ft), cut to order. Specify in inches.	L - Left R - Right	SB - Satin Brass BB - Blackened Brass AB - Antique Brass SN - Satin Nickel PN - Polished Nickel SC - Satin Copper	18 - 1800K 20 - 2000K 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 50 - 5000K	UNI - Universal Remote MLV/ELV/010V (120-277V) SW - Switchex (120V) For more info, visit lukelampco.com/drivers	For indoor use only. DR - UL Dry (Indoor) DM - UL Damp (Indoor) CR - CE Dry (Indoor)* CM - CE Damp (Indoor)* * If CE is specified, we cannot supply the drivers.



Scan QR code to view instruction manual