



This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](https://www.lukelampco.com/drivers).



Shield Detail

FIXTURE DETAILS

Dimensions

Overall: 55in H x 8in W x 2in D
Weight: ~10 pounds
Shield Diameter: 6.5 inches

Mounting

Fixture can mount directly to a hollow wall (toggle bolts included). Two mounting points 48" apart on center. Adapter plate included for optional j-box mounting.

Light Output

1050 lumens delivered. Decorative only, not a primary light source.
28 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED.
95+ CRI. 50,000+ hour lifespan.

ADA Compliance

This fixture is ADA Compliant.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper. For more information visit [lukelampco.com/finishes](https://www.lukelampco.com/finishes).


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

Driver


Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit [lukelampco.com/drivers](https://www.lukelampco.com/drivers).

DIMENSIONS

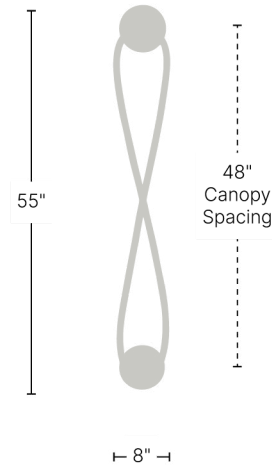

Upper canopy requires power. Lower canopy is for mounting only.

SPECIFYING CODE

FIXTURE CODE	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
SH - S - 10.3				For indoor use only.
	SB - Satin Brass BB - Blackened Brass AB - Antique Brass SN - Satin Nickel PN - Polished Nickel SC - Satin Copper	18 - 1800K 20 - 2000K 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 50 - 5000K	UNI - Universal Remote MLV/ELV/010V (120-277V) MK - MikroDim (120V) SW - Switchex (120V) For more info, visit lukelampco.com/drivers	DR - UL Dry (Indoor) DM - UL Damp (Indoor) CR - CE Dry (Indoor)* CM - CE Damp (Indoor)* * If CE is specified, we cannot supply the drivers.