




This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at lukelampco.com/drivers.

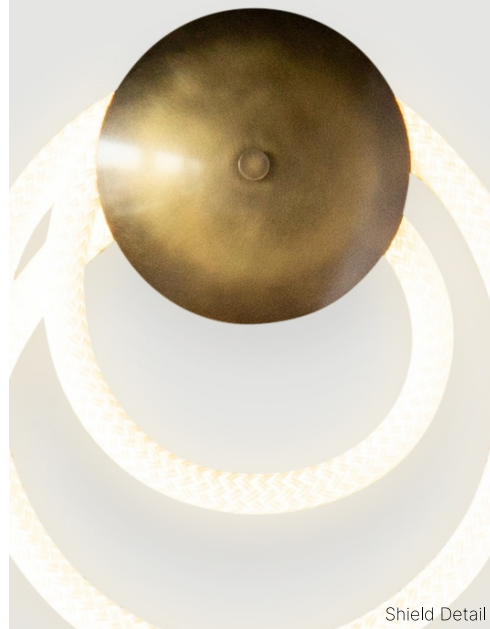

Shield Detail

FIXTURE DETAILS

Dimensions

Fixture Height: 19 inches
Fixture Width: 14 inches
Fixture Depth: 3 inches
Shield Diameter: 6.5 inches

Mounting

Fixture can mount directly to a hollow wall (toggle bolts included) or to a single junction box centered on the fixture's canopy.

Light Output

1050 lumens delivered.
28 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED. 95+ CRI. 50,000+ hour lifespan.

Orientation

Not applicable.

ADA Compliant

Yes.

Finish

Satin brass, blackened brass, antique brass, satin nickel, polished nickel, & satin copper. For more information visit lukelampco.com/finishes.


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

Driver

Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit lukelampco.com/drivers.

DIMENSIONS

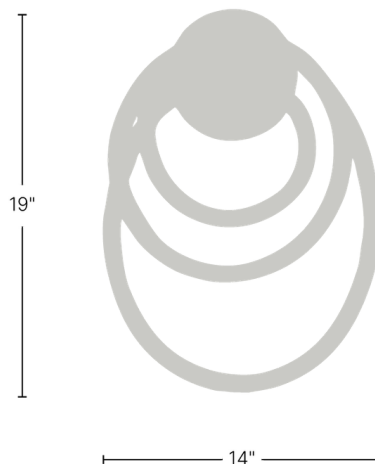

SPECIFYING CODE

FIXTURE CODE	ORIENTATION	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
SH - S - 4.1	Not applicable.	SB - Satin Brass BB - Blackened Brass AB - Antique Brass SN - Satin Nickel PN - Polished Nickel SC - Satin Copper	18 - 1800K 20 - 2000K 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 50 - 5000K	UNI - Universal Remote MLV/ELV/010V (120-277V) SW - Switchex (120V) MK - MikroDim (120V) For more info, visit: lukelampco.com/drivers	For indoor use only. DR - UL Dry (Indoor) DM - UL Damp (Indoor) CR - CE Dry (Indoor)* CM - CE Damp (Indoor)* * If CE is specified, we cannot supply the drivers.



Scan QR code to view instruction manual.