

FIXTURE DETAILS

Dimensions

Overall: 46in H x 17in W x 2in D  
Weight: ~10 pounds  
Shield Diameter: 6.5 inches

Mounting

Fixture can mount directly to a hollow wall (toggle bolts included). Two mounting points 18" apart on center. Adapter plate included for optional j-box mounting.

Light Output

770 lumens delivered. Decorative only, not a primary light source.  
20 watts @ 24VDC.

Lamping

Dimmable 24VDC integral LED.  
95+ CRI. 50,000+ hour lifespan.

Orientation

Left or Right (see above) styled at installation.

ADA Compliance

This fixture is ADA Compliant.

Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper. For more information visit [lukelampco.com/finishes](http://lukelampco.com/finishes).


Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.


Driver

Must be installed with the included 24VDC driver(s). Driver(s) are not integral to the fixture. For more info visit [lukelampco.com/drivers](http://lukelampco.com/drivers).

DIMENSIONS

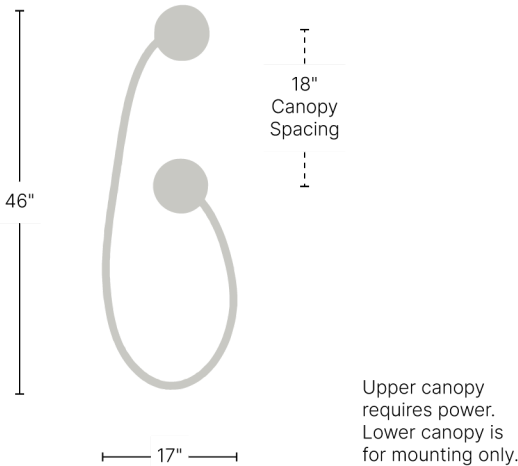

SPECIFYING CODE

FIXTURE CODE	FINISH	COLOR TEMPERATURE	DRIVER	CERTIFICATION
SH - S - 8.2				For indoor use only.
	<p><b>SB</b> - Satin Brass</p> <p><b>BB</b> - Blackened Brass</p> <p><b>AB</b> - Antique Brass</p> <p><b>SN</b> - Satin Nickel</p> <p><b>PN</b> - Polished Nickel</p> <p><b>SC</b> - Satin Copper</p>	<p><b>18</b> - 1800K</p> <p><b>20</b> - 2000K</p> <p><b>24</b> - 2400K</p> <p><b>27</b> - 2700K</p> <p><b>30</b> - 3000K</p> <p><b>35</b> - 3500K</p> <p><b>42</b> - 4200K</p> <p><b>50</b> - 5000K</p>	<p><b>UNI</b> - Universal Remote MLV/ELV/010V (120-277V)</p> <p><b>MK</b> - MikroDim (120V)</p> <p><b>SW</b> - Switchex (120V)</p> <p>For more info, visit <a href="http://lukelampco.com/drivers">lukelampco.com/drivers</a></p>	<p><b>DR</b> - UL Dry (Indoor)</p> <p><b>DM</b> - UL Damp (Indoor)</p> <p><b>CR</b> - CE Dry (Indoor)*</p> <p><b>CM</b> - CE Damp (Indoor)*</p> <p>* If CE is specified, we cannot supply the drivers.</p>