

This is a low voltage (24VDC) fixture and must be wired with the included 24VDC driver(s). Drivers are not integral to the fixture. Learn more at [lukelampco.com/drivers](http://lukelampco.com/drivers).



Canopy Detail

## Fixture Details

### Dimensions

30in H x 1in W x 1in D  
Canopy Diameter: 2.25in  
Weight: ~4 pounds

### Mounting

Mounts directly to hollow ceiling. Pendant cord is field-adjustable from 6in to 120in, and up to 300in upon request. For mounting to junction boxes, please contact sales.

### Light Output

255 lumens delivered. Decorative only, not a primary light source.  
7W @ 24VDC

### Lamping

Dimmable 24VDC integral LED.  
95+ CRI. 50,000+ hour lifespan.

### Cord Length

120in of field-adjustable pendant cord provided. To request a custom length up to 300in, specify below.

### Finish

Satin Brass, Blackened Brass, Antique Brass, Satin Nickel, Polished Nickel, & Satin Copper.  
More at [lukelampco.com/finishes](http://lukelampco.com/finishes).


### Color Temperature

1800K, 2000K, 2400K, 2700K, 3000K, 3500K, 4200K, & 5000K.

### Driver

One 24VDC LED driver required.  
Fixture must be installed with the included driver. Driver is not integral to the fixture.  
More at [lukelampco.com/drivers](http://lukelampco.com/drivers).

## Dimensions

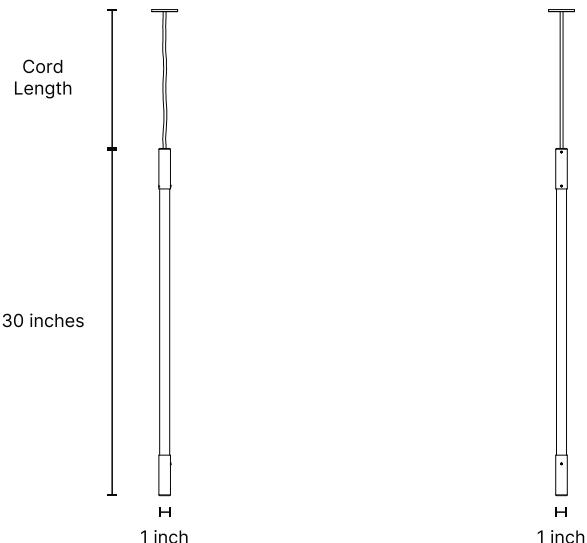

## Specifying Code

Fixture Code	Cord Length	Finish	Color Temperature	Driver	Certification
2.5FT - RE - P	—	—	—	—	For indoor use only.
	—IN - 120in of field-adjustable cord included. If more is needed, up to 300in can be specified here.	SB - Satin Brass BB - Blackened Brass AB - Antique Brass SN - Satin Nickel PN - Polished Nickel SC - Satin Copper	18 - 1800K 20 - 2000K 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 50 - 5000K	UNI - Universal Remote MLV/ELV/010V (120-277V) SW - Switchex (120V)	DR - UL Dry (Indoor) DM - UL Damp (Indoor) CR - CE Dry (Indoor)* CM - CE Damp (Indoor)*

Scan QR code to view instruction manual